

12-6-2020

Theoretical Study for One Row of Piles Used as a Breakwater.

E. Heikal

Associate Professor., Water Engineering Department., Zagazig University., Zagazig., Egypt

T. Salem

Structural Engineering Department., Zagazig University., Zagazig., Egypt.

A. Koraim

Assistant Professor., Water Engineering Department., Zagazig University., Zagazig., Egypt.

Follow this and additional works at: <https://mej.researchcommons.org/home>

Recommended Citation

Heikal, E.; Salem, T.; and Koraim, A. (2020) "Theoretical Study for One Row of Piles Used as a Breakwater."
Mansoura Engineering Journal: Vol. 32 : Iss. 1 , Article 3.

Available at: <https://doi.org/10.21608/bfemu.2020.127894>

This Original Study is brought to you for free and open access by Mansoura Engineering Journal. It has been accepted for inclusion in Mansoura Engineering Journal by an authorized editor of Mansoura Engineering Journal. For more information, please contact mej@mans.edu.eg.

THEORETICAL STUDY FOR ONE ROW OF PILES USED AS A BREAKWATER

دراسة نظرية لصف واحد من الخوازيق يستخدم كحاجز أمواج

Heikal E. M.¹, Salem T. N.² and Koraim A. S.³

1- Asso. Prof., Water Eng. Dept, Zagazig Univ., Zagazig, Egypt

2- Asso. Prof., Structural Eng. Dept, Zagazig Univ., Zagazig, Egypt

3- Dr., Water Eng. Dept, Zagazig Univ., Zagazig, Egypt

الملخص العربي

بهتم هذا البحث بدراسة كفاءة حواجز الأمواج الخوازيقية المكونة من صف واحد من الخوازيق المربعة أو الدائرية نظرياً باستخدام مفكوك دالة أيجن. حيث تم حساب كلا من معامل الانتقال و معامل الارتداد للعديد من خصائص الأمواج و المسأ. و قد تم اختبار قابلية النموذج الرياضي المقترح لحساب كفاءة هذه الحواجز عن طريق مقارنة نتائجه بنتائج نظرية و معملية لدراسات أخرى. و لقد أوضحت النتائج أن النموذج الرياضي المقترح يمكن أن يستخدم بكفاءة عالية للتنبؤ بكفاءة حواجز الأمواج الخوازيقية المكونة من صف واحد من الخوازيق.

Abstract:

The performance of the pile breakwater consisted of one row of vertical circular or square piles was investigated theoretically using Eigenfunction expansion method. The transmission and the reflection coefficients were calculated for different wave and structure parameters. The validity of the theoretical model was examined by comparing the results with the theoretical and the experimental results from different studies. It was concluded that; the proposed theoretical model could be used efficiently to predict the performance of the pile breakwaters consisting of one row.

1. Introduction:

The row or more of the closely spaced piles extending above the seabed to some distance over the water surface was considered as wave control barrier. This barrier may be used as a breakwater used for protecting coastal areas, fishing harbors, and marina. The pile breakwater was successfully employed in a variety of low and moderate wave energy applications. This type of breakwaters minimized the pollution aspects near shores in where it permits exchanging the water mass. The control of wave height near shores using the pile breakwaters was required for decreasing the beach erosion and enables to use the protected coasts efficiently.

The functional performance of the pile breakwater is evaluated by examining the wave reflection and transmission around the breakwater. In order to examine the wave scattering by vertical pile

breakwaters, physical hydraulic tests were developed by Wiegel (1961), Hayashi and Kano (1966), Herbich (1989), Kakuno and Lui (1993), Mani and Jayakumar (1995), Abdel-Mawla and Balah (2001), and Heikal and Koraim (2004). Efforts towards developing analytical models for predicting the wave reflection and transmission have also been made. Hayashi et al (1968), Martin and Dalymple (1988), Kriebel (1992) Kakuno and Liu (1993) Mani (1998), and Park et al (2000) provided analytical solutions for pile breakwaters.

In this research paper, the wave transmission and reflection around breakwater which consisted of one row of square or circular piles was modeled for linear, monochromatic, normal waves. This was by using the Eigenfunction expansion method. The transmission and reflection coefficients were calculated for different wave and structure parameters. Also, the comparison between the theoretical results

and the theoretical and experimental results from different studies was carried out.

2. Theoretical Analysis:

The wave diffraction around breakwater which consisted of one row of square or circular cylinders (piles) was modeled for linear, monochromatic, normal waves. The analysis proceeded under the assumptions that the fluid is incompressible, inviscid and that the motion is irrotational. Further assumption was that the boundary condition on the free surface could be linearized. The breakwater is continuous and located at $x=0$ as shown in Figure (1). The distance between the centers of two adjacent cylinders is denoted as "a", the width of an opening is "G" and the pile diameter or width is "d".

The velocity potential consists of free propagating modes and non-propagating evanescent wave modes. Applying the assumption of wide spacing approximation (Park et al , 2000) so that the evanescent wave modes near the cylinders may be neglected. The velocity potential can be expressed as follows:

$$\phi(x, z, t) = \frac{-gH_i}{2\omega} \phi(x) \frac{\cosh k(z+h)}{\cosh kh} e^{-i\omega t} \quad (1)$$

In which $\phi(x)$ is the horizontal velocity potential, H_i is the incident wave height, g is the gravitational acceleration, h is the water depth, k is the wave number ($k=2\pi/L$, where L is the wave length) and ω is the angular wave frequency ($\omega=2\pi/T$, where T is the wave period).

2.1 Governing Equation:

The governing equation for the potential function, $\phi(x)$, is the modified Helmholtz equation which can be defined as follows:

$$\frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial z^2} + k^2 \phi = 0 \quad (2)$$

2.2 The Flow Potential Solution:

The reduced potentials seaward, ϕ_1 , and shoreward, ϕ_2 , are presented in Park et al [9] as follows:

$$\phi_1(x) = e^{ikx} + k_r e^{-ikx}, \quad x < 0 \quad (3)$$

$$\phi_2(x) = k_t e^{ikx}, \quad x > 0 \quad (4)$$

In which k_r and k_t are the complex value of reflection and transmission coefficients and k must satisfy the dispersion relationships for the propagating mode only:

$$\omega^2 = -gk \tanh(kh) \quad (5)$$

The reduced potentials seaward, ϕ_1 , and shoreward, ϕ_2 , must satisfy the matching conditions at the location of the piles (at $x = 0$). These potentials provide continuity of potential and horizontal velocity normal to the vertical plane separating the fluid regions as follows:

$$\phi_1(x) = \phi_2(x) + 2C \frac{\partial \phi_1(x)}{\partial x} + \frac{i\alpha}{\omega} \frac{\partial \phi_1(x)}{\partial x} \quad \text{at } x = 0 \quad (6)$$

$$\frac{\partial \phi_1(x)}{\partial x} = \frac{\partial \phi_2(x)}{\partial x} \quad \text{at } x = 0 \quad (7)$$

In which C is the blockage coefficient and α is the depth average linearized dissipation coefficient. The blockage coefficient (C) depends only on the shape and geometry of the row of the piles. The depth average linearized dissipation coefficient (α) is related to the wave characteristics near the piles. The second and third terms on the right hand side of equation (6) represents the inertia resistance and the energy dissipation due to flow separation near the row of piles. The blockage coefficient (C) and the depth average linearized dissipation coefficient (α) are estimated in Kakuno and Liu [5].

2.3 Solution Procedure:

Let us express the complex reflection (k_r) and transmission (k_t) coefficients as follows [9]:

$$k_r = a_0 + ib_0 \quad (8)$$

$$k_t = c_0 + id_0 \quad (9)$$

substituting equations (8) and (9) into (3) and (4), then;

$$\phi_1(x) = e^{ikx} + (a_0 + ib_0)e^{-ikx}, \quad x < 0 \quad (10)$$

$$\phi_2(x) = (c_0 + id_0)e^{ikx}, \quad x > 0 \quad (11)$$

Applying the matching condition defined in equation (7), then yield:

$$(b_0 + d_0) + i(1 - a_0 - c_0) = 0 \quad (12)$$

Then,

$$b_0 + d_0 = 0 \quad (13)$$

$$1 - a_0 - c_0 = 0 \quad (14)$$

Applying the matching condition defined in equation (6), then yield:

$$[(1 - R_n) + (1 + R_n)a_0 + P_n b_0] + i[P_n - P_n a_0 + (1 + R_n)b_0] = c_0 + id_0 = 0 \quad (15)$$

Then;

$$(1 - R_n) + (1 + R_n)a_0 + P_n b_0 - c_0 = 0 \quad (16)$$

$$P_n - P_n a_0 + (1 + R_n)b_0 - d_0 = 0 \quad (17)$$

Where $P_n = 2Ck$, and $R_n = \alpha k / \omega$

Solving the system of linear equations in the unknowns a_0 , b_0 , c_0 and d_0 in equations (13), (14), (16) and (17), then yield:

$$a_0 = \frac{R_n(2 + R_n) + P_n^2}{(2 + R_n)^2 + P_n^2} \quad (18)$$

$$b_0 = -\frac{2P_n}{(2 + R_n)^2 + P_n^2} \quad (19)$$

$$c_0 = \frac{2(2 + R_n)}{(2 + R_n)^2 + P_n^2} \quad (20)$$

$$d_0 = \frac{2P_n}{(2 + R_n)^2 + P_n^2} \quad (21)$$

2.4 Reflection and Transmission Coefficients:

substituting equations (18) to (21) in to equations (8) and (9), then the transmission and the reflection coefficients are as follows:

$$k_t = \frac{R_n(2 + R_n) + P_n^2}{(2 + R_n)^2 + P_n^2} - \frac{2P_n}{(2 + R_n)^2 + P_n^2}i \quad (22)$$

$$k_r = \frac{2(2 + R_n)}{(2 + R_n)^2 + P_n^2} + \frac{2P_n}{(2 + R_n)^2 + P_n^2}i \quad (23)$$

3. Theoretical Results Verification:

Figures (2) and (3) present the comparison between the present theoretical and the experimental transmission coefficients obtained by Heikal and Koraim (2004) [3]. This is for circular and rectangular pile breakwaters respectively. The figures show that a reasonable agreement between the theoretical results

and the experimental results is achieved. This means that the theoretical model can be used for predicting the transmitted wave energy through the structure.

Figure (4) presents the comparison among the present theoretical results and the experimental and theoretical results obtained by Kakuno et al (1993) [5]. This is for transmission, reflection and energy loss coefficients for slotted breakwater when $kh=0.48$, $G/d=0.17$, $d/h=0.6$ and $B/h=0.2$. The figure shows that the Kakuno theoretical results equal the present theoretical results. Also, the figure shows that a reasonable agreement between the present theoretical results and Kakuno experimental results.

Figure (5) shows the comparison between the present theoretical transmission coefficient and the results obtained by different studies. This is for slotted breakwater when $kh=0.48$, $G/d=0.5$, $d/h=0.7$ and $B/h=0.2$. The figure shows a good agreement between the present results and the different theoretical results. Also, the figure shows a reasonable agreement between the present results and the experimental results.

Figure (6) shows the comparison among the present theoretical transmission coefficient and the results obtained by different studies. This is for square pile breakwater when $kh=0.48$, $G/d=1.0$ and $d/h=0.2$. The figure shows that a good agreement between the present results and the different theoretical and experimental results.

4. Theoretical Results:

Figures (7) and (8) present the theoretical results of circular pile breakwater. This is for different wave and structural parameters. Figure (7) presents the relationship between the theoretical transmission coefficient (k_t) and the dimensionless wave steepness (H_i/L). This is for different values of gap-diameter ratios (G/d) and dimensionless wave number (kh). The figure shows that the

transmission coefficient (k_t) decreases with the increase of H_i/L . Also, the transmission coefficient (k_t) decreases with the decrease of (G/d).

Figure (8) presents the relationship between the theoretical reflection coefficient (k_r) and the dimensionless wave steepness (H_i/L). This is for different values of gap-diameter ratios (G/d) and dimensionless wave number (kh). The figure shows that the reflection coefficient (k_r) take the inverse trade. This means that the reflection coefficient (k_r) increases with the increase of H_i/L . Also, the reflection coefficient (k_r) increases with the decrease of (G/d).

Figures (9) and (10) present the theoretical results of rectangular pile breakwater. This is for different wave and structural parameters. Figure (9) presents the relationship between the theoretical transmission coefficient (k_t) and the dimensionless wave steepness (H_i/L). This is for different values of gap-diameter ratios (G/d) and dimensionless wave number (kh). The figure shows that the transmission coefficient (k_t) decreases with the increase of H_i/L and the decrease of (G/d).

Figure (10) presents the relationship between the theoretical reflection coefficient (k_r) and the dimensionless wave steepness (H_i/L). This is for different values of gap-diameter ratios (G/d) and dimensionless wave number (kh). The figure shows that the reflection coefficient (k_r) increases with the increase of H_i/L and the decrease of (G/d).

5. Conclusions:

The main conclusions are summarized as follows:

1. The transmission coefficient decreases with the increase of the wave steepness and the decrease of the gap between piles.
2. The reflection coefficient increases with the increase of the wave steepness and the decrease of the gap between piles.

3. The proposed theoretical model can be used for predicting the performance of the pile breakwaters.

6. References:

1. Ahdel-Mawla, S. and Balah, M. (2001) "Wave Energy Absorption by an Inclined Slotted-Wall Breakwater" *J. of Scientific Research, Faculty of Eng., Suez Canal Univ., Port-Said*.
2. Hayashi, T., and Kano, T. (1966) "Hydraulic Research on the Closely Space Pile Breakwater" 10th Coastal Eng. Conf., ASCE, New York, Vol.11, Ch. 50.
3. Hayashi, T., Hattori, M., and Shirai, M. (1968) "Closely Spaced Pile Breakwater as a Protection Structure Against Beach Erosion" Coastal Eng. In Japan, Vol. 11.
4. Heikal, E. M. and Koraim, A. S. (2004) "Characteristics of Pile Breakwaters" *The Egyptian J. for Eng. Sciences and Technology, Faculty of Eng., Zagazig Univ. Vol. 9, No. 1.*
5. Herbich, J. B. (1989) "Wave Transmission Through a Double-Row Pile Breakwater" Proc. 21st Int. Conf. on Coastal Eng., ASCE, Chapter 165, Torremolinos, Spain.
6. Kakuno, S., and Liu, P. L. F. (1993) "Scattering of Water Waves by Vertical Cylinders" *J. Waterway, Port, Coastal and Ocean Eng., ASCE, Vol.119, No.3.*
7. Kriebel, D. L. (1992) "Vertical Wave Barriers: Wave Transmission and Wave Forces" 23rd Int. Conf. on Coastal Eng., ASCE, Vol.2.
8. Martin, P. A. and Dalrymple, R. A. (1988) "Scattering of Long Waves by Cylinders Obstacles and Gratings Using Matched Asymptotic Expansions" *J. of Fluid Mechanics, Vol. 188, pp. 465-490.*
9. Mani, J. S and Jayakumar, S. (1995) "Wave Transmission by Suspended Pipe Breakwater" *J. of Waterway, Port, Coastal Eng., Vol. 121, No 6.*
10. Mani, J. S., (1998) "Wave Forces on Partially Submerged Pipe


Breakwater” Ocean Wave Kinematics, Dynamics and Loads on Structures, Vol.1.

11. Park, W. S., Kim, B., Suh, K. and Lee, K. (2000) “Irregular Wave Scattering by Cylinder Breakwaters” Korea-China Conf. on Port and Coastal Eng., Seoul, Korea.
12. Wiegel, R.L., (1961) “Closely Spaced Piles as a Breakwater” Dock and Harbor Authority, Vol. 42, No 491.


7. LIST OF SYMBOLS:

Symbol	Definition
a_0, b_0, c_0, d_0	= Unknown Coefficients
a	= Distance Between Piles Centers
C	= Blockage Coefficient
d	= Pile Diameter or Width
e	= Exponential Number (2.72)

g	= Acceleration of Gravity
G	= Gap Between Piles
h	= Water Depth at the Breakwater Site
H_i	= Incident Wave Height
H_r	= Reflected Wave Height
H_t	= Transmitted Wave Height
i	= Imaginary Number ($\sqrt{-1}$)
k	= Incident Wave Number
k_r	= Reflection Coefficient
k_t	= Transmission Coefficient
L	= Wave Length at Breakwater Site
t	= Time
T	= Wave Period
x, z	= Three Dimensional Axis
α	= Linearized Dissipation Coefficient
ϕ, ϕ_1, ϕ_2	= Flow Velocity Potential
π	= 3.14
ω	= Angular Wave Frequency

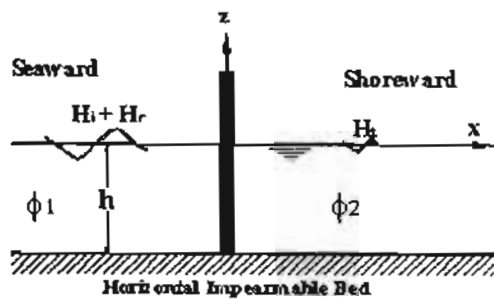


Elevation




Plan

(a) Circular pile breakwater

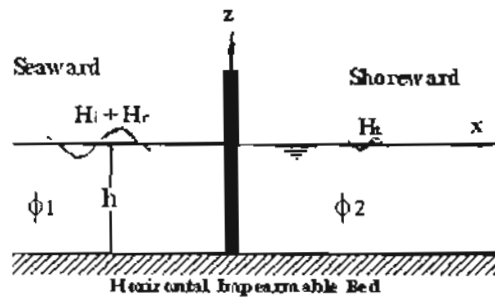

Elevation



Plan

(b) Square piles breakwater

Figure. (1) Schematic Diagram for the Pile Breakwater Models

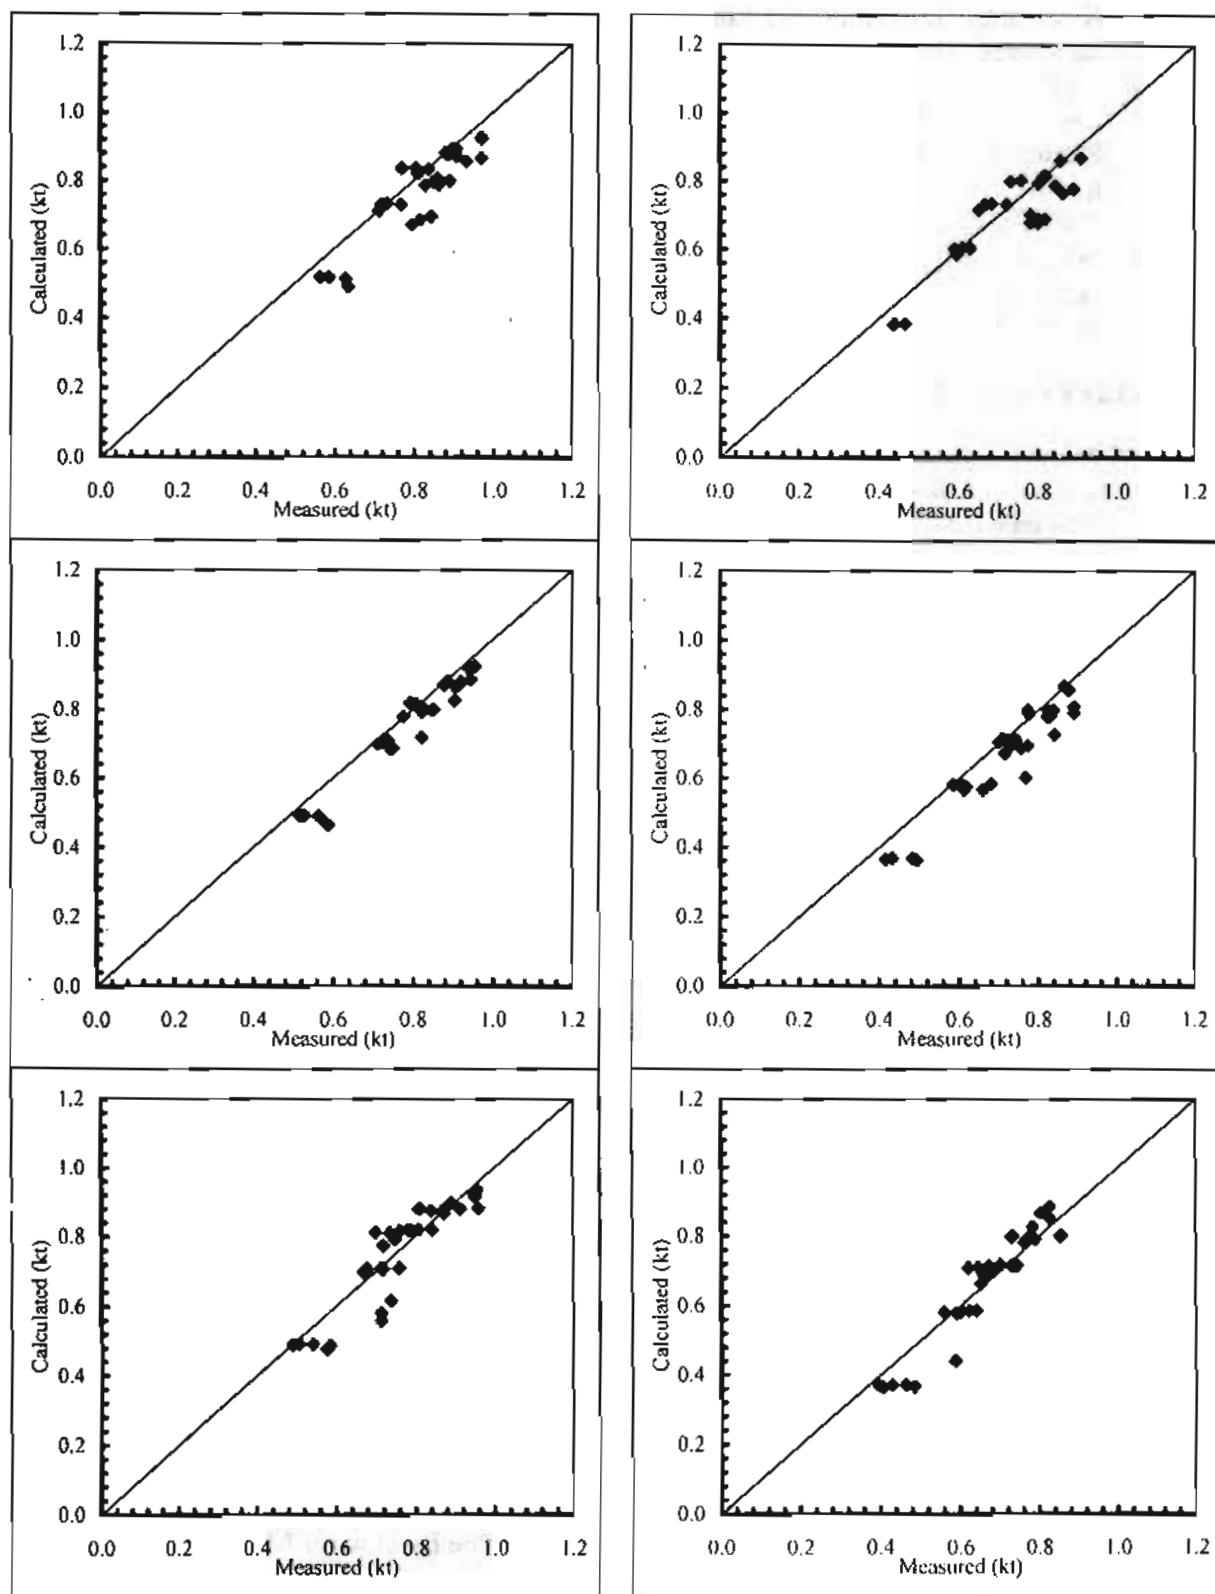


Fig. (2) Comparison Between Measured and Calculated Transmission Coefficients by One Row of Circular Piles for: (a) $d/h = 0.22$ (b) $d/h = 0.17$ (c) $d/h = 0.13$

Fig. (3) Comparison Between Measured and Calculated Transmission Coefficients by one Row of Square Piles for: (a) $d/h = 0.22$ (b) $d/h = 0.17$ (c) $d/h = 0.13$

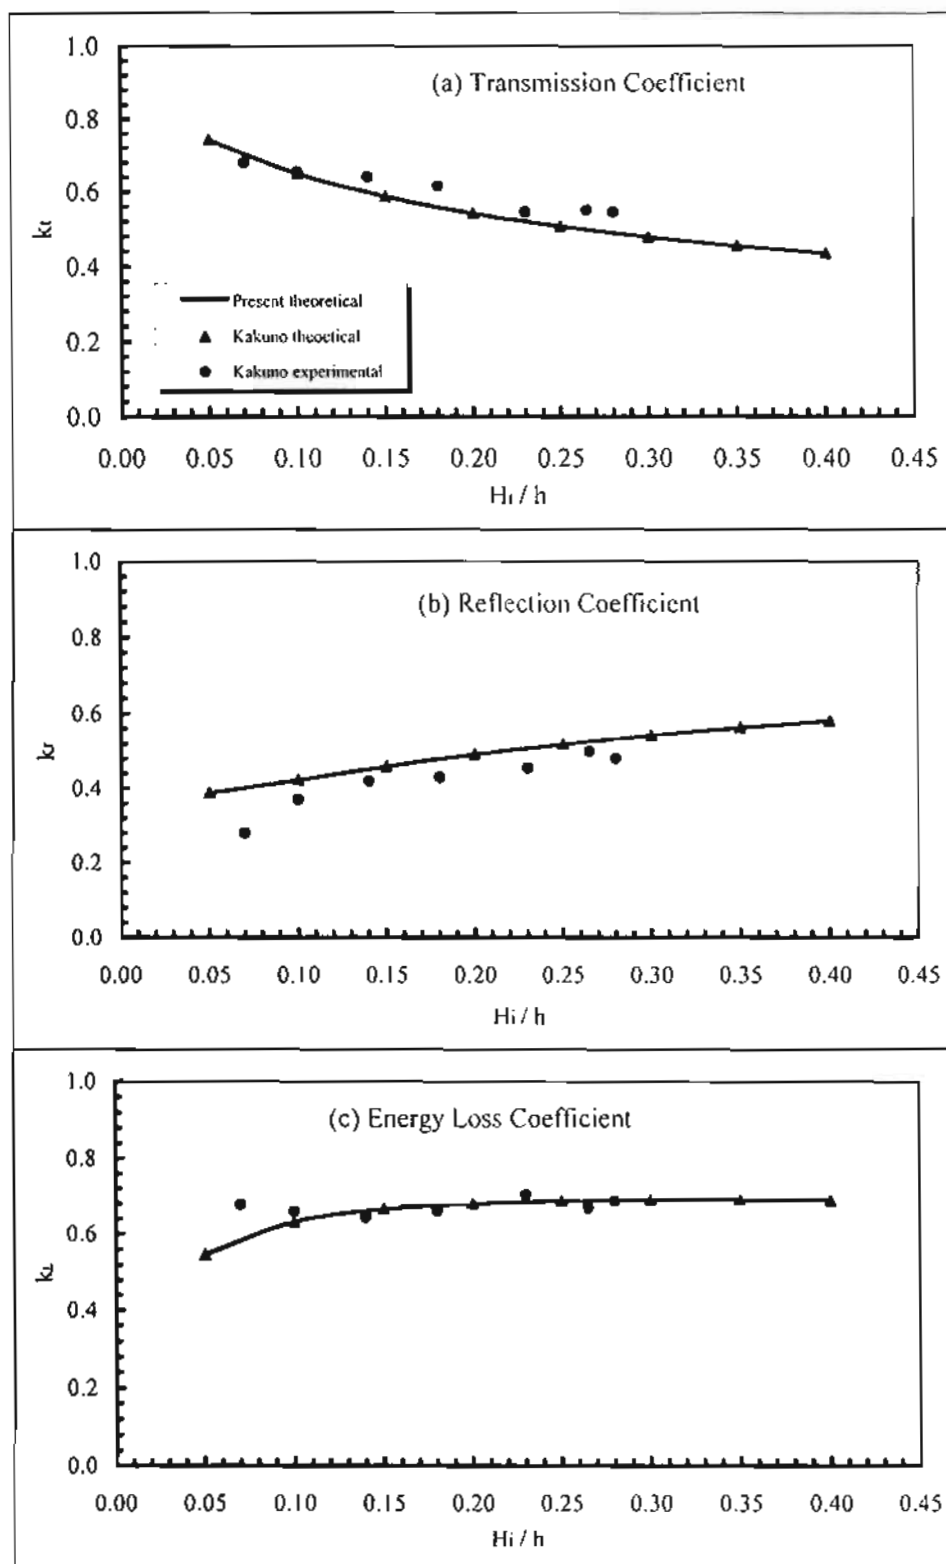


Fig. (4) The Comparison Between the Present Theoretical Results and Kakuno et al (1993) Results for Rectangular slotted Breakwater when $kh=0.48$, $G/d=0.17$, $d/h=0.7$ and $B/h=0.2$

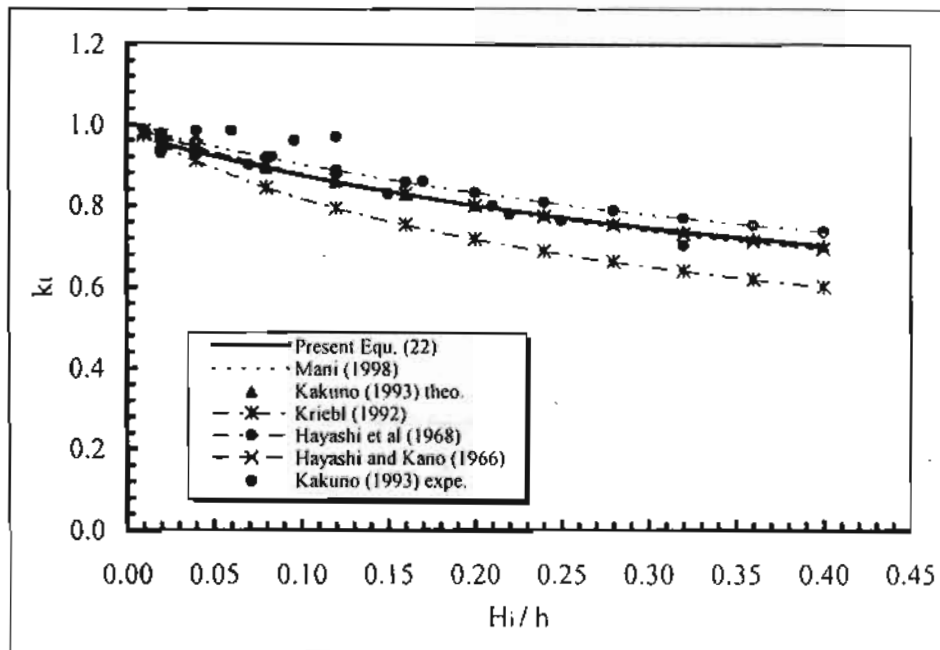


Fig. (5) The Comparison Between the Present Theoretical Results Equ. (22) and Different Studies for Rectangular slotted Breakwater when $kh=0.48$, $G/d=0.5$, $d/h=0.7$ and $B/h=0.2$

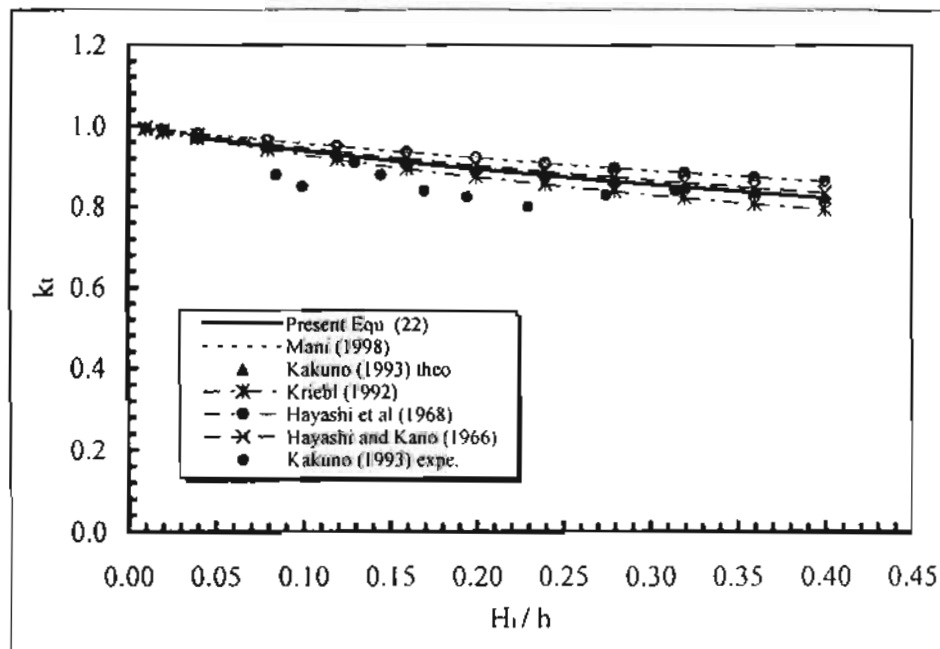


Fig. (6) The Comparison Between the Present Theoretical Results Equ. (22) and Different Studies for Square Pile Breakwater when $kh=0.48$, $G/d=1.0$ and $d/h=0.2$

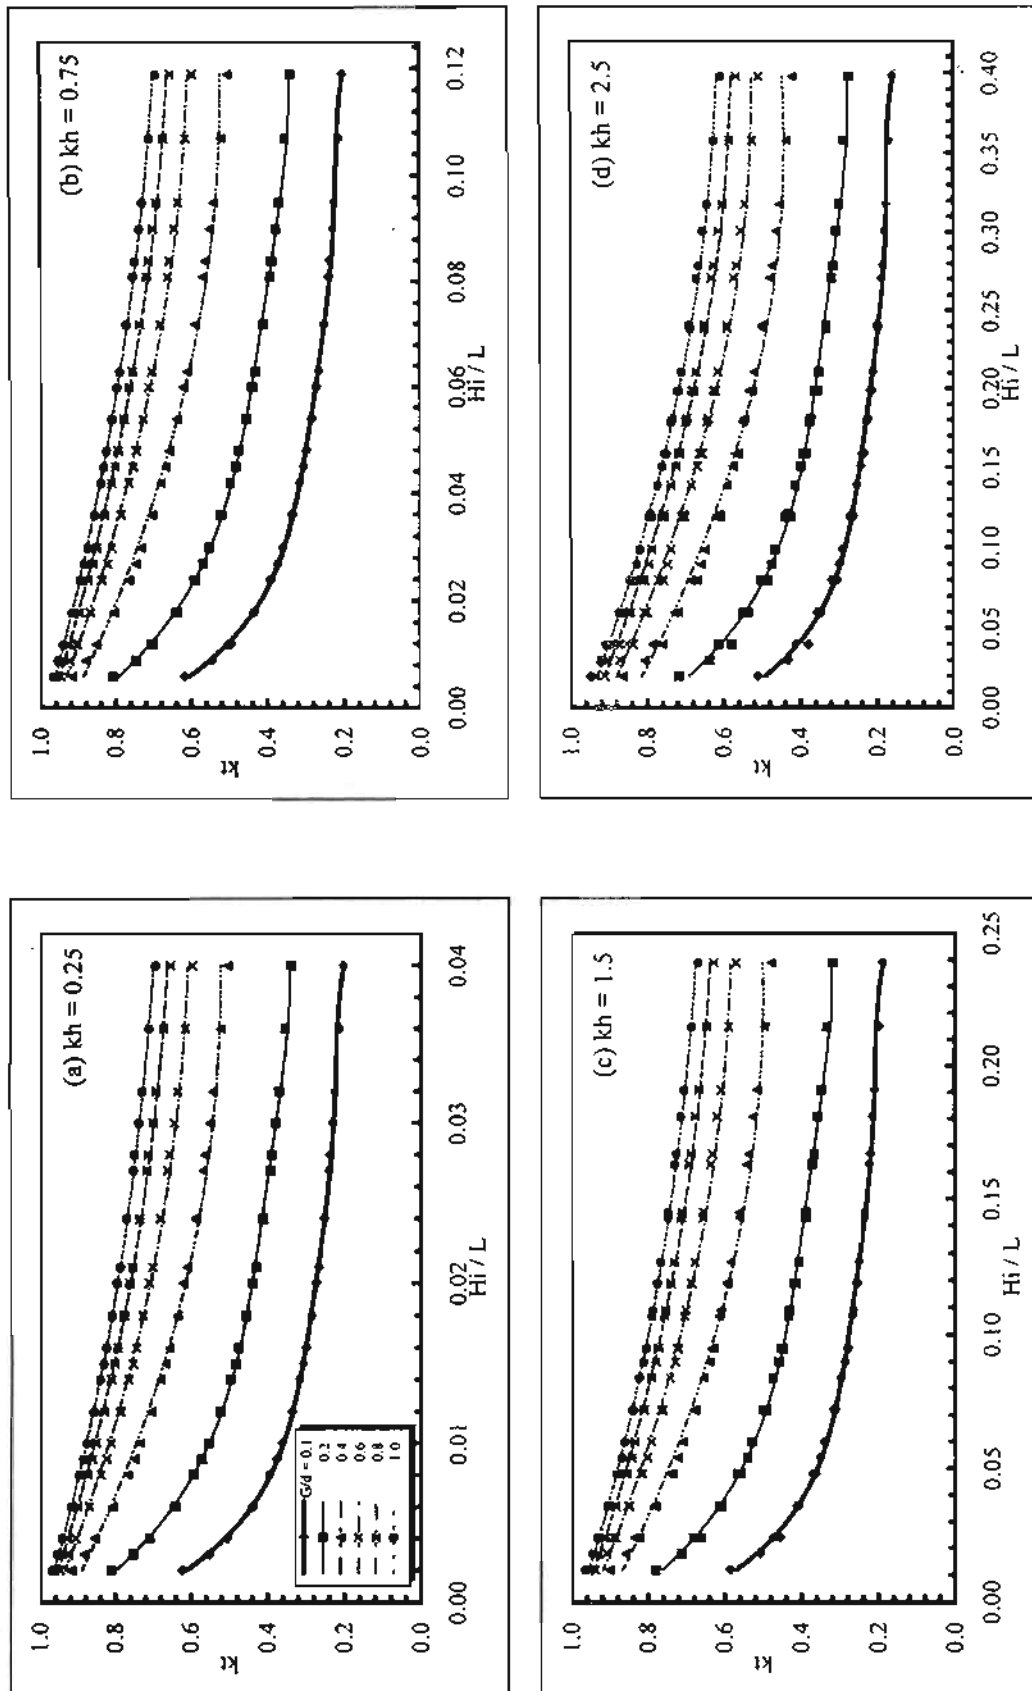


Fig. (7) The Theoretical Transmission Coefficient (k_t) Versus Wave Steepness (H_i/L) for Different Wave and Structural Parameters for Square Pile Breakwater

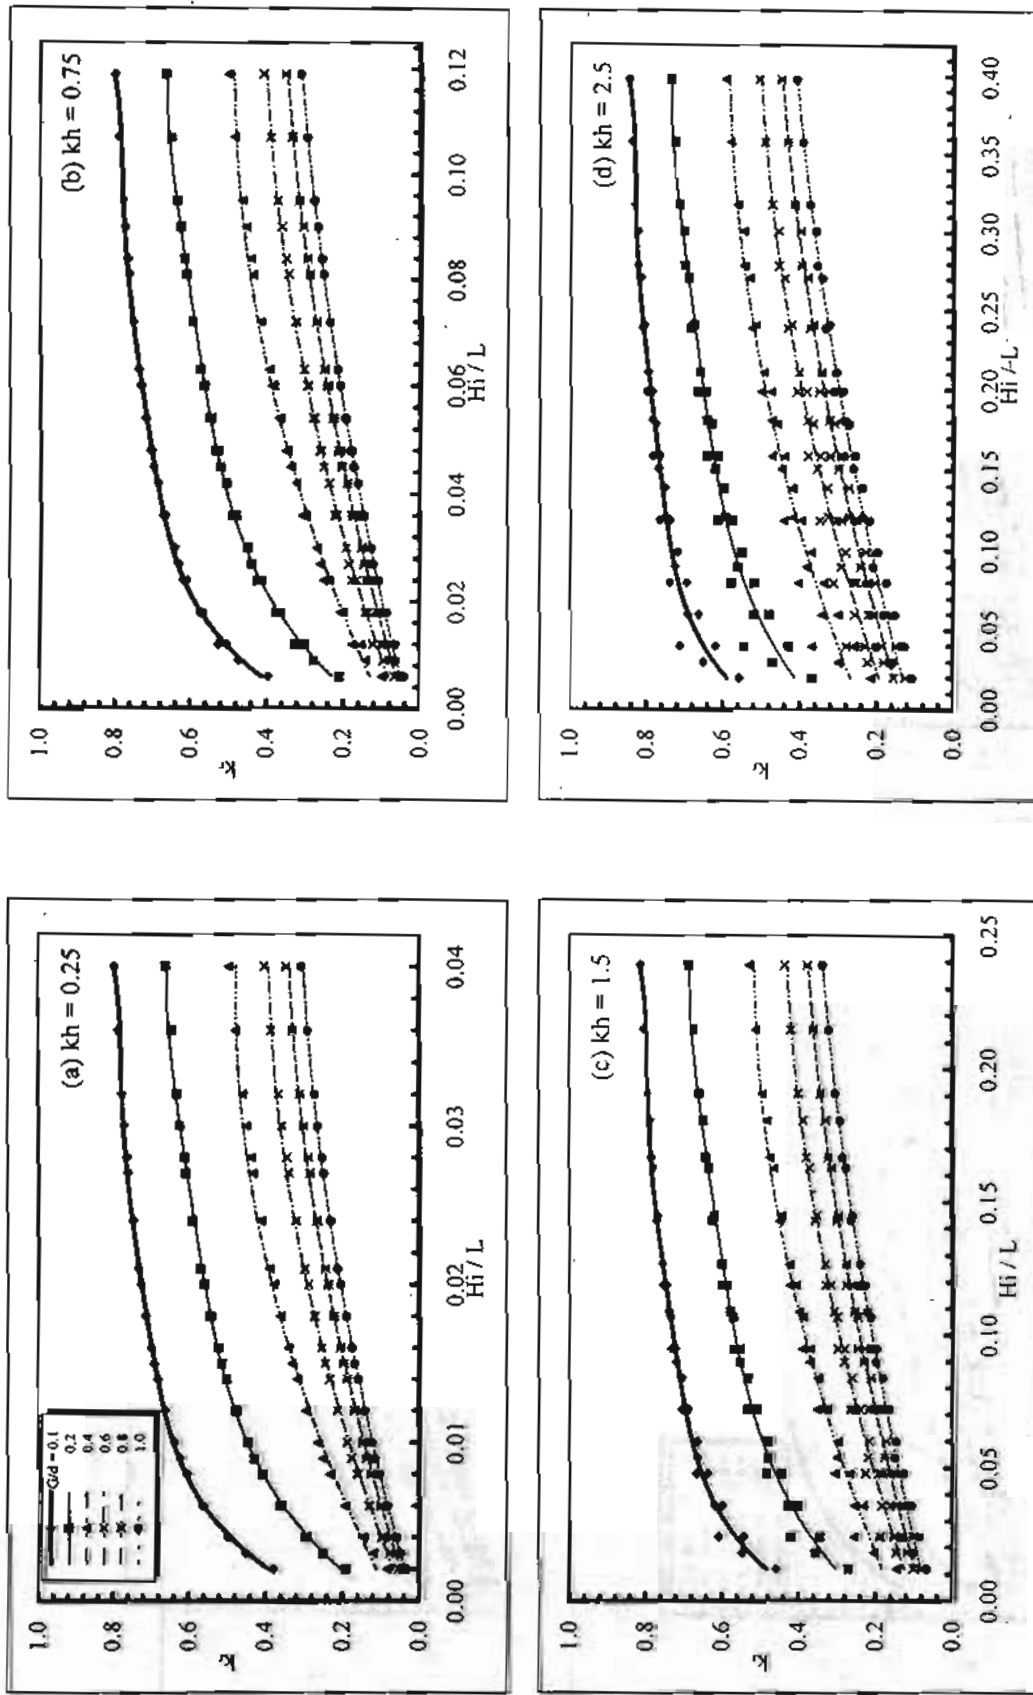


Fig. (8) The Theoretical Reflection Coefficient (K_r) Versus Wave Steepness (H_i/L) for Different Wave and Structural Parameters for Square Pile Breakwater

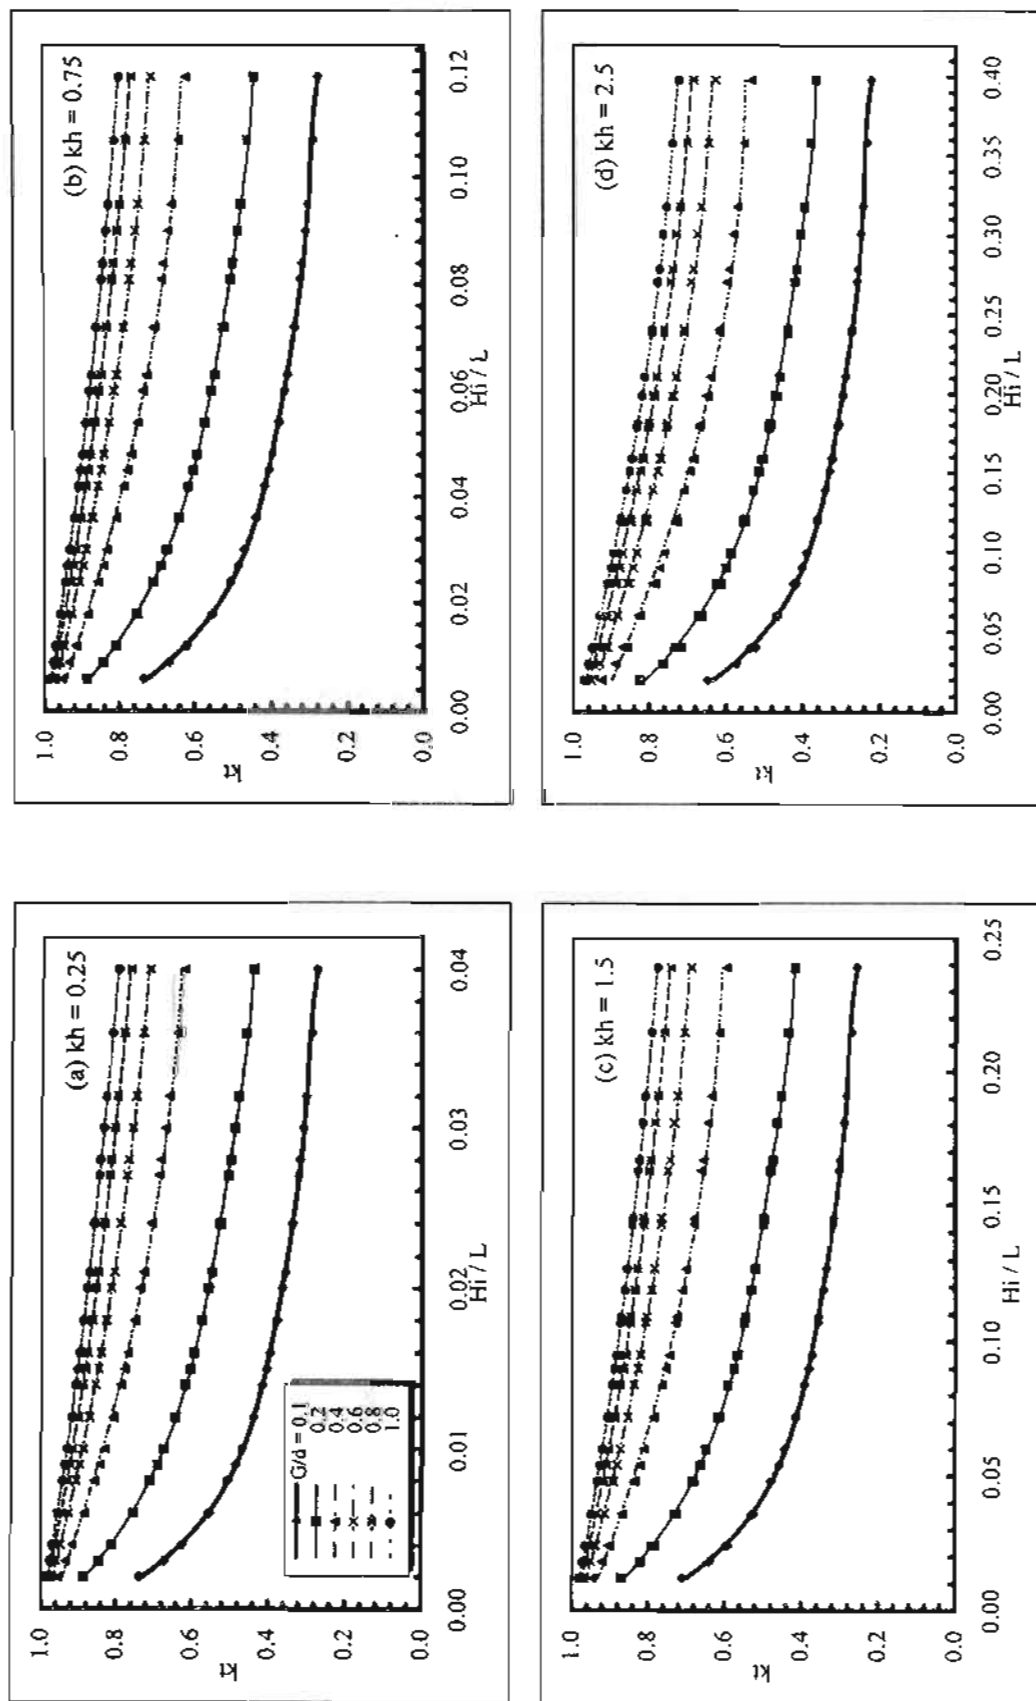


Fig. (9) The Theoretical Transmission Coefficient (k_t) Versus Wave Steepness (H_i/L) for Different Wave and Structural Parameters for Circular Pile Breakwater

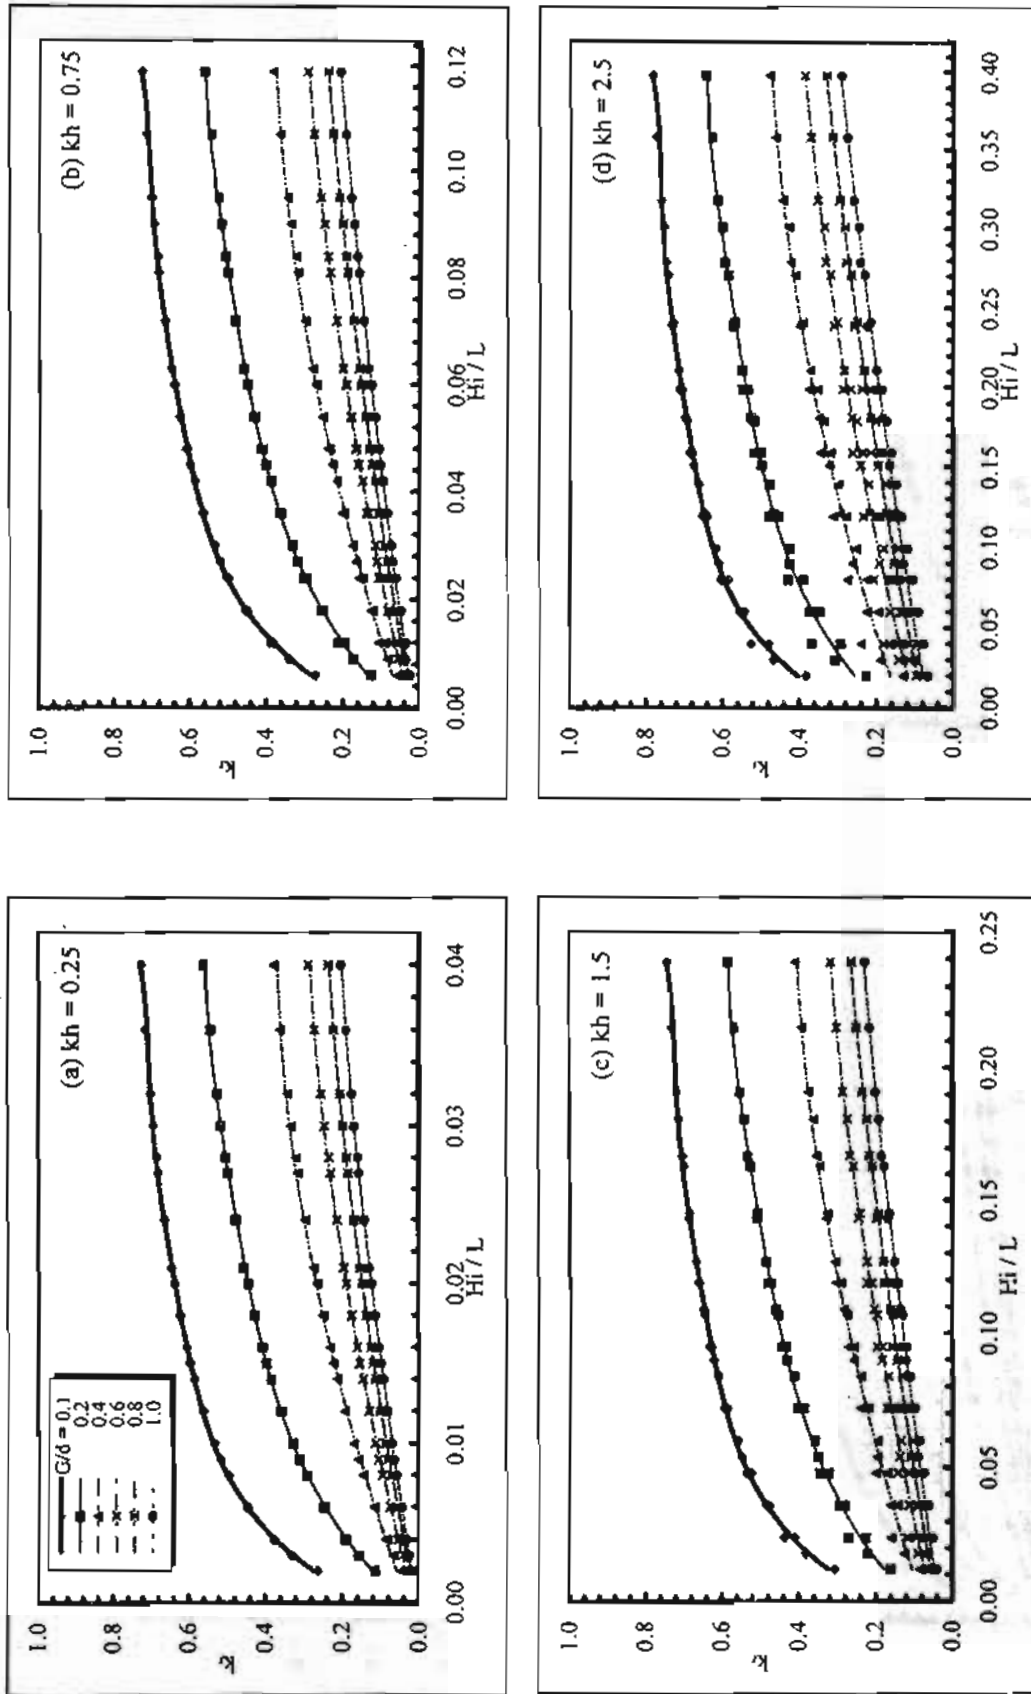


Fig. (10) The Theoretical Reflection Coefficient (k) Versus Wave Steepness (H_i/L) for Different Wave and Structural Parameters for Circular Pile Breakwater