

11-22-2020

Database for Optimal Selection of Cutting Conditions, Forces and Power Consumption in Machining Processes.

A. El Bahloul

Professor of Production Engineering and Mechanical Design Department., Faculty of Engineering., El-Mansoura university., Mansoura., Egypt., elballoul@hoinall.com

I. Elewa

Dean of High Institute of Engineering and Technology, Mansoura, Egypt.

Fatma Elerian

Assistant Professor., Production Engineering and Mechanical Design Department., Faculty of Engineering.. Mansoura University., Mansoura., Egypt., fatmaelerian@mans.edu.eg

E. Gadelmawla

Associate Professor., Production Engineering and Mechanical Design Department., Faculty of Engineering., El-Mansoura University., Mansoura., Egypt., esamy@motus.edu.eg

Follow this and additional works at: <https://mej.researchcommons.org/home>

Recommended Citation

El Bahloul, A.; Elewa, I.; Elerian, Fatma; and Gadelmawla, E. (2020) "Database for Optimal Selection of Cutting Conditions, Forces and Power Consumption in Machining Processes.," *Mansoura Engineering Journal*: Vol. 35 : Iss. 1 , Article 31.

Available at: <https://doi.org/10.21608/bfemu.2020.124699>

This Original Study is brought to you for free and open access by Mansoura Engineering Journal. It has been accepted for inclusion in Mansoura Engineering Journal by an authorized editor of Mansoura Engineering Journal. For more information, please contact mej@mans.edu.eg.

Database for Optimal Selection of Cutting Conditions, Forces and Power Consumption in Machining Processes

قاعدة بيانات للاختيار الأمثل لظروف القطع والقوى والقدرة المستهلكة في عمليات التشغيل

A.M. El Bahloul^a, I.M. Elewa^b, E.S. Gadelmawla^c, Fatma Elerian^d

^a Prof. in Prod. Eng. And Mech. Design Dept, Faculty of engineering, Mansoura university, Mansoura, Egypt, Elbahloul@hotmail.com

^b Prof., Dean of High Institute of Engineering and Technology, Mansoura, Egypt.

^c Assoc. Prof. in Prod. Eng. and Mech. Design Dept, Faculty of engineering Mansoura university, Mansoura, Egypt, esamy@mans.edu.eg

^d Assistant Lecture in Prod. Eng. and Mech. Design Dept, Faculty of engineering, Mansoura university Mansoura, Egypt, eng_fatma2000@yahoo.com

الملخص العربي:

إن اختيار بيانات القطع (سرعة القطع، والتغذية، وعمق القطع) ونوع العدة القاطعة يلعبان دورا هاما في تقليل وقت وتكلفة الإنتاج. وفي هذا البحث تم تصميم قاعدة بيانات باستخدام SQL server لتخزين كم كبير من المواد المختلفة التي يتم تشغيلها في الصناعة، وتخزين بيانات القطع، والأنواع المختلفة للعدد القاطعة، ومجموعة من عمليات التشغيل المختلفة. وتم أيضا عمل برنامج باستخدام Visual Basic.net لاختيار بيانات القطع المثلى، والعدة القاطعة المناسبة لثلاث عمليات تشغيل مختلفة (الخرطة والثقب والتفريز). ويمكن اختيار بيانات القطع المثلى والعدة القاطعة المناسبة لأقصى أو أقل سرعة قطع متاحة في قاعدة البيانات، وذلك طبقا لقدرة الماكينة وكفاءتها ودرجة تشطيب السطح المطلوبة للشغلة. كذلك يتم حساب قوى القطع والعزم والقدرة المستهلكة، ويتم حساب الزمن الكلي لعمليات الإنتاج والتكلفة الكلية للمنتج، ثم يتم عرض كل العمليات وتفاصيلها في تقرير واحد في وقت قليل جدا. ومن خلال الدراسة التي أجريت على منتج تم تشغيله كنموذج للدراسة وجد أنه عند استخدام أقصى سرعة قطع يمكن توفير حوالي 34% من الوقت الكلي اللازم للإنتاج، وذلك مقارنة باستخدام أقل سرعة قطع. وفي المقابل وجد أنه عند استخدام أقل سرعة قطع يمكن توفير حوالي 28% من التكلفة الكلية للمنتج مقارنة باستخدام أقصى سرعة قطع.

Abstract

Selecting the cutting data (cutting speed, feed, depth of cut) and the proper cutting tools play a significant role in achieving minimum production time, consistent quality and in controlling the overall cost of manufacturing. However, searching for a proper tool/insert-job combination calls for a huge amount of data and an extensive knowledge base and may take a long time and effort if it is done manually. In this paper, a software has been designed and established using Microsoft Visual Basic.Net and SQL server to store all different types of tool grades with their available cutting data, inserts, and tool holders for all materials and some machining operations (turning, drilling and milling) in a database. The software is capable of selecting the suitable cutting data, tool grade, insert and tool holders for each operation in two cases. The first case uses the maximum cutting speed of the tool grade (minimum tool life) while the second case uses the minimum cutting speed (maximum tool life). In the two cases, the software considers the constraints of power, efficiency, and maximum spindle revolution of the machine as well as the required surface roughness of the workpiece. The software is capable of calculating the machining time, intermittent time, force, torque, power, spindle revolution and total production time and cost for each operation. In addition, the workpiece material, required operations, cutting data, force, torque, power, the suitable tool grade and its manufacturer, insert and tool holder are displayed in a single report as a process sheet. Another report can be used to show the total production time and the total cost. A case study has been done to test the proposed software and it was found that about 34% of the total production time could be saved by using the maximum cutting speed, compared with the minimum cutting speed. On the other hand, about 28% of the total production cost could be saved by using the minimum cutting speed, compared with the minimum cutting speed.

Keywords

Cutting conditions, databases, machining processes, optimal selection, power consumption

Nomenclature

| | | | |
|-----------|---|-----------|--|
| a | Thickness of undeformed chip (mm) | mc | Rise in specific cutting force as a function of chip thickness |
| B | Milling cutter engagement (mm) | N_{cut} | Power consumed in cutting (kW) |
| b | Width of undeformed chip (mm) | N_e | Power rating of the electric motor (kW) |
| C_u | Unit cost (L.E) | N_μ | Power caused by friction (kW) |
| C_l | Labour cost (L.E/min) | n | Maximum spindle revolution (rpm) |
| C_{mat} | Cost of raw material per part (L.E) | n_{cal} | Calculated spindle revolution by the program (rpm) |
| C_o | Overhead cost (L.E/min) | s | Feed per revolution (mm/rev) |
| C_t | Cost of a cutting tool (L.E) | s_m | Feed per minute (mm/min) |
| D | Diameter (mm) | s_z | Feed per tooth (mm/tooth) |
| F_z | Tangential force (main cutting force) (N) | T | Tool life (min) |
| F_μ | Force caused by friction (N) | T_m | Machining time (min) |
| h_m | Average chip thickness (mm) | t | Depth of cut (mm) |
| i | Number of passes | t_s | Setup time (min) |
| k_c | Specific cutting resistance offered by the work material (N/mm ²) | t_{tc} | Tool changing time (min) |
| L | Travel of tool or workpiece in direction of the feed motion, (mm) | v | Cutting speed (m/min) |
| l | The machined surface length in the direction of the feed motion (mm) | y | tool approach (mm) |
| M | Bending moment (N.mm) | z_n | Number of teeth of cutter |
| M_μ | Moment caused by friction (N.mm) | φ | Approach angle (degree) |
| | | Δ | Tool over travel (mm) |
| | | ω | Helix angle |

1. Introduction

Machinability data plays an important role in the efficient utilization of machine tools and significantly influence the overall manufacturing costs. The most widely used source of machinability data is the Machining Data Handbook published by Metcut Research Associates, 1980, ASM International Handbook Committee and catalogues of companies that produce the cutting tools [1 - 5]. Machinability data consists of the selection of the appropriate cutting tools and machining parameters, which includes cutting speed, feed rate and depth of cut. No doubt that determining of the suitable cutting data, selecting of a proper cutting tool (tool grade, insert and tool holder) from a huge amount of available data is difficult and takes along of times, also calculating the machining time, force, torque, power, total production time and cost for each operation needs a lot of time. Ribeiro, et al [6] presented a machining database system involving procedures to make

comparative tests using different tools and optimize the attained results to find suitable cutting conditions for application at industrial scale.

Yeo, et al [7] developed an expert system for machinability data selection. The expert system automatically selects cutting tools for external turning in both roughing and finishing operations, determined machining data and cutting fluid. Fuzzy-logic principles had been applied by Hashmi et al [8, 9] for selecting cutting conditions in machining operations. The presented results showed a very good correlation between the Machining Data Handbook's recommended cutting speed values and those predicted using the fuzzy logic model, which had been used in the drilling operation to select drilling speeds for three different materials. The development stages of an online fuzzy expert system (FES) were presented by Wong, et al [10-12]. It could be used by the process planner as an aid of

establishing the strategy of machining data selection for a specific machining process and an implementation of an online knowledge-based system for machinability data selection was presented by them, Fuzzy logic had been incorporated as the reasoning mechanism behind the system.

Wang et al [13] presented an optimization analysis, strategy and CAM (computer aided manufacturing) software for the selection of economic cutting conditions in single pass turning operations using a deterministic approach. Juan et al [14] described the development of a model based on fuzzy logic for selecting cutting speed in single-point turning operations. A manual effort by Mookherjee et al [15] of searching were substituted for an expert system, which automatically selected the turning tool/insert or milling insert, the material and the geometry, based on the requirements of users. According to the author's knowledge there is no complete work in the subject of research.

The aim of this work is to construct and create a software to select the cutting data (speed, feed, depth of cut) from a database and calculate the machining time, cutting force, torque and cutting power consumed in two cases: (a) minimum tool life, (b) maximum tool life. In the two cases, the software considers the constraints of power, efficiency and max spindle revolution of the machine and the required surface roughness of the workpiece using different techniques of operations (turning, milling and drilling). It also used to determine the suitable tool grade, insert and tool holder of each operation, besides calculating the total machining time and cost in these two cases. All the operations which had been done, cutting data, machining time, force, torque, power, the suitable cutting tool and (insert/tool holder) are reported in a process sheet, besides showing the values of total production time and cost in a separate report.

2. Selection of cutting conditions

Selections of efficient cutting conditions are important to have short cutting time, long tool

life and high cutting accuracy. Machining Data Handbook published by Metcut Research Associates, 1980 and catalogues of companies that produce the cutting tools are the commonly used source of cutting conditions. The data in the handbooks and catalogues were separated into different types of machining process. Then, the data grouped according to the types of workpiece material and the respective hardness (in BHN). The handbook and catalogues provide the cutting speed and feed rate for each workpiece material and hardness, one may scan through different tool materials. For examples, catalogues of Sandvik Coromant company show the values of feeds and cutting speeds of different grades for turning, drilling and milling operations. The values of feed and cutting speed differ with tool grades and material to be machined [3, 4].

Tool grades are numbered on a scale that ranges from maximum hardness to maximum toughness. Harder grades are used for finishing operations (high speeds, low feeds and depths), while tougher grades are used for roughing operations. The tool manufacturers assign many names and numbers to their product. While many of these names and numbers may appear to be similar, the applications of these tool materials may be entirely different. For example Sandvik Coromant Company gave names to its products of tool grade as follows: (CT5015, GC4015, GC2015, GC2025, GC2035, GC235, GC3025, CC620, H13A and so on). Each grade has its special composition.

3. Cutting forces, torque and power consumptions

3.1 Cutting force, torque and power consumptions for turning operations

The tangential cutting force F_z can be calculated by the following empirical equation using the concept of specific cutting resistance:

$$F_z = s \times t \times k_c \quad (1)$$

Torque can be calculated by the following formula:

$$M = \frac{D}{2} \times F_z \quad (2)$$

Using the concept of specific cutting resistance, power is calculated as:

$$N_{cut} = \frac{v \times t \times s \times k_c}{60 \times 10^3} \text{ kW} \quad (3)$$

Taking into consideration the efficiency η of the machine tool, there is no difficulty in calculating the required (design) power rating of the electric motor of the main drive. Thus:

$$N_e = \frac{N_{cut}}{\eta} \text{ kW} \quad (4)$$

3.2 Cutting force, torque and power consumptions for drilling operations

The tangential component F_z and the torque M and power can be calculated by using the concept of specific cutting resistance as the following:

1. For solid drilling:

Force can be calculated by this formula:

$$F_z = 0.5 \times \frac{D}{2} \times s \times k_c \times \sin \varphi \text{ N} \quad (5)$$

Torque can be calculated by this formula:

$$M = \frac{D \times F_z}{2} \text{ N.mm} \quad (6)$$

Power can be calculated by this formula:

$$N_{cut} = \frac{D \times s \times k_c \times v}{240 \times 10^3} \text{ kW} \quad (7)$$

2. For boring and trepanning:

Force can be calculated by this formula:

$$F_z = 0.5 \times t \times s \times k_c \times \sin \varphi \text{ N} \quad (8)$$

Torque can be calculated by this formula:

$$M = \frac{D \times s \times t \times k_c}{2} \left[1 - \frac{t}{D} \right] \text{ N.mm} \quad (9)$$

Power can be calculated by this formula:

$$N_{cut} = \frac{t \times s \times k_c \times v}{60 \times 10^3} \left[1 - \frac{t}{D} \right] \text{ Kw} \quad (10)$$

3. For deep drilling, deep trepanning and counter boring:

Force can be calculated by this formula:

$$F_z + F_\mu = 0.65 \times t \times s \times k_c \times \sin \varphi \text{ N} \quad (11)$$

Torque can be calculated by this formula:

$$M + M_\mu = \frac{D \times s \times t \times k_c}{2000} \left[1.17 - \frac{t}{D} \right] \text{ N.mm} \quad (12)$$

Power for deep drilling can be calculated by this formula:

$$N_{cut} + N_\mu = \frac{s \times v \times D \times k_c}{240 \times 10^3} \times 1.34 \text{ kW} \quad (13)$$

Power for trepanning and counter boring can be calculated by this formula:

$$N_{cut} + N_\mu = \frac{s \times v \times D \times k_c}{240 \times 10^3} \times \left[1.17 - \frac{t}{D} \right] [16] \quad (14)$$

3.3 Cutting force, torque and power consumptions for milling operations

The force F_z can be calculated by the following formula:

$$F_z = \frac{60 \times 10^3 \times N_{cut}}{v} \text{ N} \quad (15)$$

The tangent (peripheral) force F_z sets up the moment of resistance for cutting:

$$M = \frac{F_z D}{2} \text{ N.mm} \quad (16)$$

The power is calculated by the following formula using k_c :

$$N_{cut} = \frac{t \times B \times s_m \times k_c}{60 \times 10^6} \text{ kW [4]} \quad (17)$$

The length of travel (y) required before cutting the full diameter:

$$y = \frac{D}{2} \cot \phi \text{ mm} \quad (23)$$

Machining time in peripheral milling is:

$$T_m = \frac{L}{s_m} = \frac{l + y + \Delta}{s_z z n} \text{ min} \quad (24)$$

Machining time in face milling is calculated by the formula:

$$T_m = \frac{l + y + \Delta}{s_m} \text{ min} \quad (25)$$

4.2 Production cost

The ultimate objective of the manufacturing engineer is to produce the objects at the most economical cost. To do this he should be able to analyze the machining process for all possible costs. So that he would be able to optimize the process to get the minimum possible costs satisfying all the requirements.

Unit cost—The unit cost has generally been

represented by the following equation [17]:

$$C_u = c_{mor} + (c+c)t_s + (c+c)T_m + (c t_{tc} + c + c t_{to}) \left(\frac{T_m}{T} \right) \quad (26)$$

In the case of multi-tool operations, tool changing time for each tool used must be considered regardless of this ratio. This changes the above equation to:

$$C_u = c_{mor} + (c+c)t_s + \sum_{i=1}^m (c+c)T_{m_i} + \sum_{i=1}^m (c_i \left(\frac{T_{m_i}}{T} \right) + \sum_{i=1}^m (c+c)t_{to_i} \quad (27)$$

Where: m represents the number of machining features or operations required to produce the part.

5. The software and algorithm

Microsoft SQL server was used to design a database. To attach the designed database, calculate machining time, force, torque, power and total production time and cost for

4. Machining time and total production time and cost

4.1 Production time

The production time required for manufacturing a number of workpieces in a definite operation is made up of elements shown in Fig. 1.

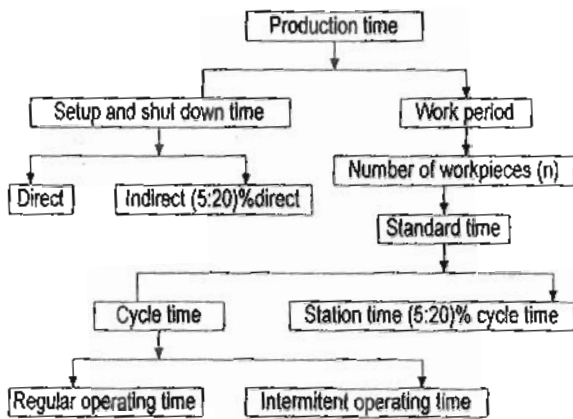


Fig. 1: Production time chart

The regular operating time (machining time) is calculated using some equations according to operation required as shown below:

For turning operation the time will be denoted by T_m :

$$T_m = \frac{L}{ns} \text{ min} \quad (18)$$

$$L = l + y + \Delta \text{ mm} \quad (19)$$

$$y = t \cot \phi \text{ mm} \quad (20)$$

For a number of passes of the same feed and speed, machining time will be:

$$T_m = \frac{L}{ns} i \text{ min} \quad (21)$$

Machining time in drilling and enlarging holes is:

$$T_m = \frac{L}{ns} = \frac{l + y + \Delta}{ns} \text{ min} \quad (22)$$

machining processes and showing results in a single report, the Microsoft Visual Basic.Net programming language was used. The link between Microsoft SQL server and Microsoft Visual Basic.Net programming language is maintained by Microsoft OLEDB Provider. The software consists of three parts: (1) the database, (2) Software algorithms (3) the graphical user interface GUI as follows.

5.1 The database

To store data of operations, workpiece materials, manufacturer of tools, tool grades, inserts, tool holders and cutting data, a number of tables were designed as shown in Fig. 2.

5.2 The software algorithm

The software algorithm is shown in Fig. 3. It is used to calculate the machining time either by using maximum cutting speed (minimum tool life) or by using minimum cutting speed (maximum tool life) of the stored tool grades. It

is also used to determine the suitable cutting data, calculate the tangential force, torque, power and total production time and cost. In addition, it is used to select the suitable tool grades, insert and tool holder for different operations of turning, drilling and milling.

5.3 The Graphical User Interface

The graphical user interface (GUI) of the developed software deals with a number of windows that were designed to make it easy to the user to deal with the program. The main windows of the program (Fig. 4) contains four main menus, each of them includes a number of submenus. The first three main menus were designed to connect the database, for example by double clicking the tools grades submenu shown in Fig. 4, the window in Fig. 5 will appear and by double clicking the new button, the window shown in Fig.6 will appear.

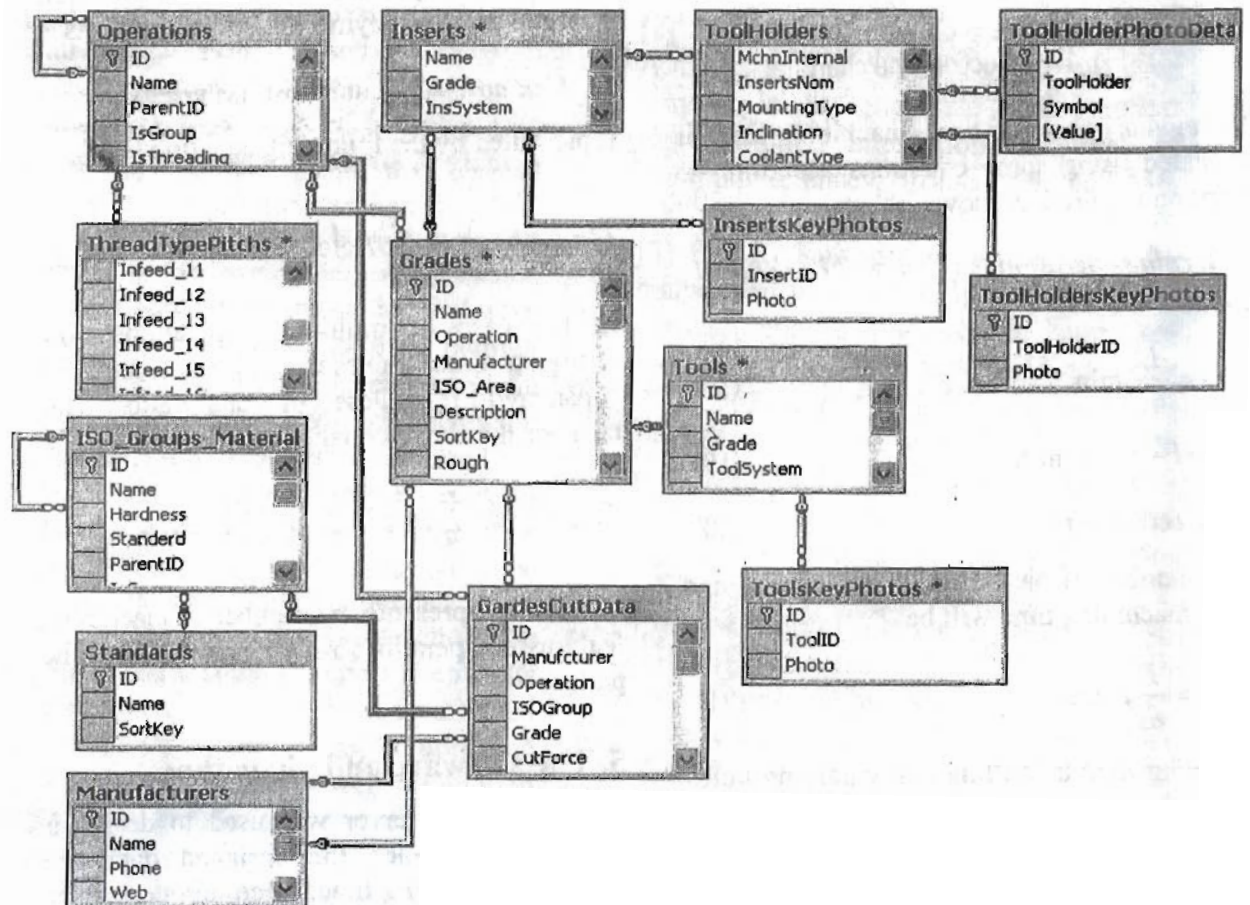


Fig. 2: The designed tables and their relations

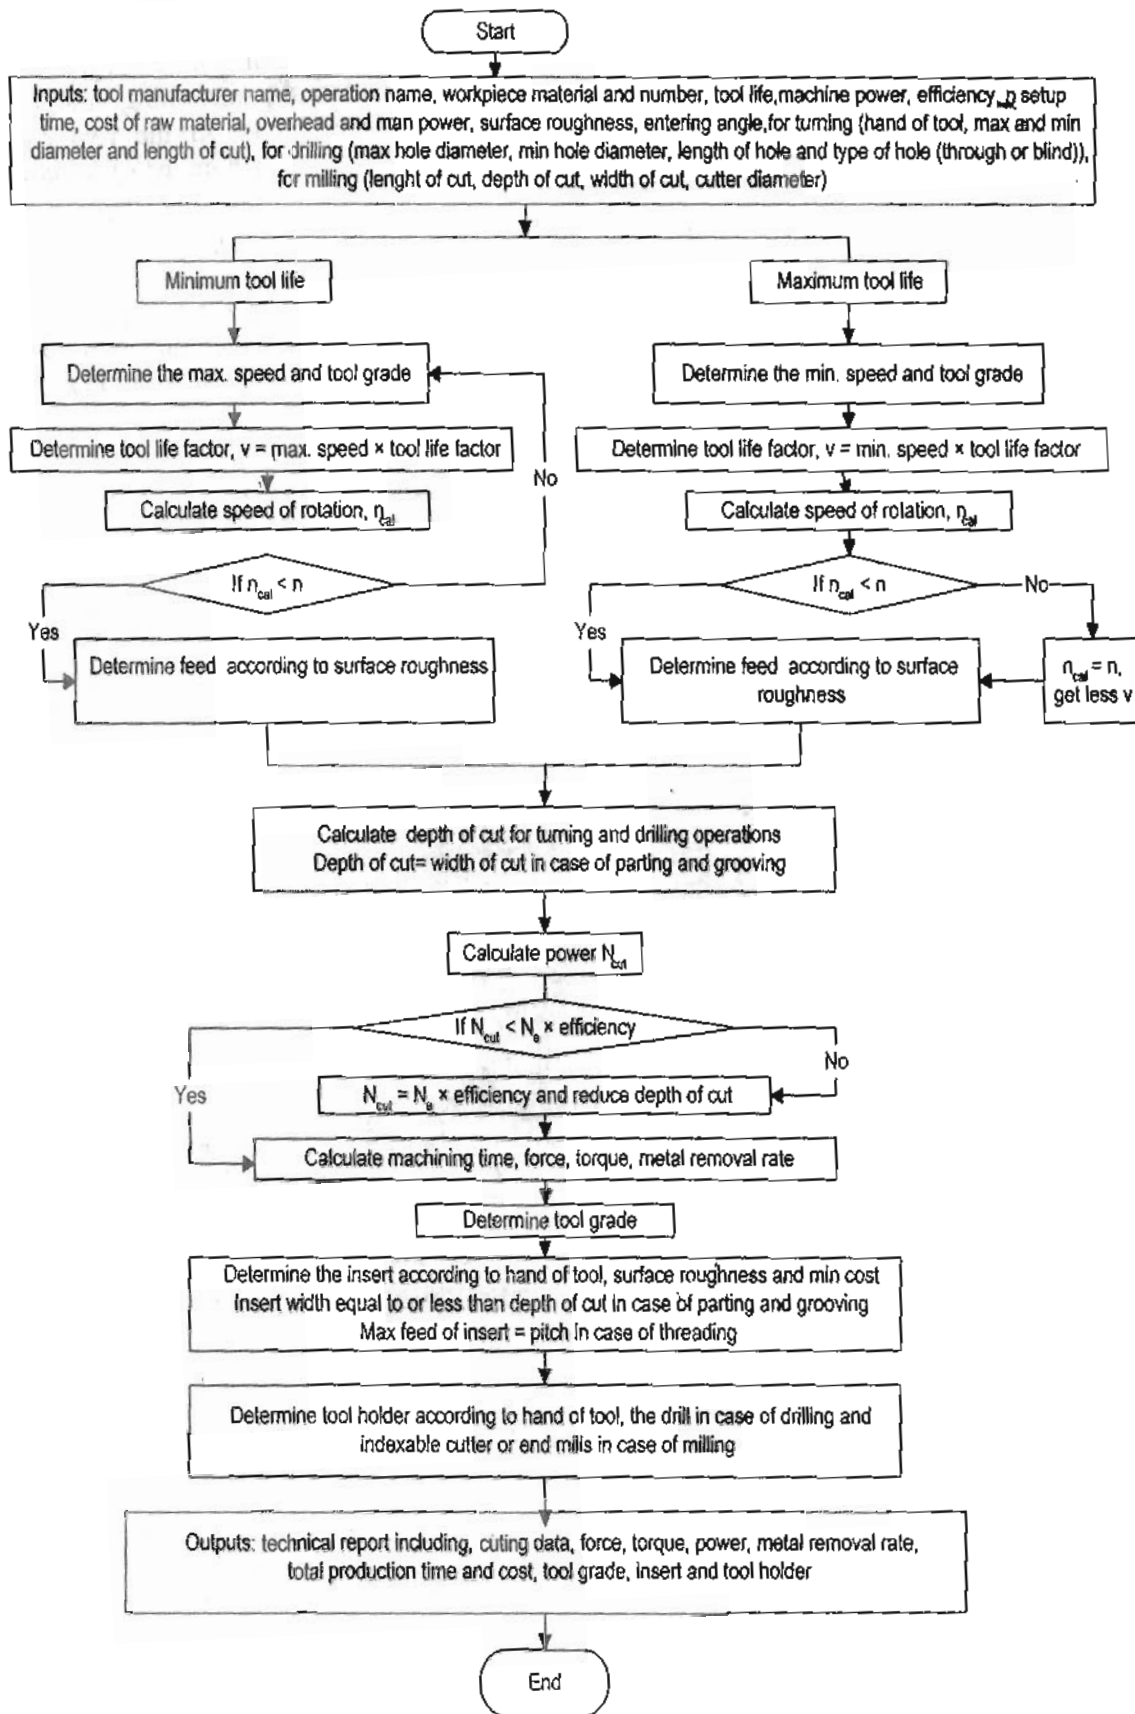


Fig. 3: Algorithm used for different techniques of turning, drilling and milling operations using minimum or maximum tool life

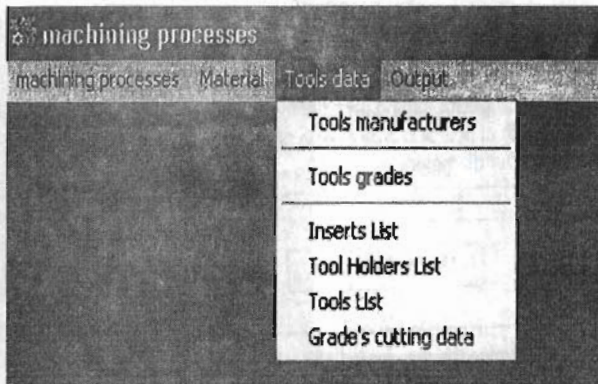


Fig. 4: The main window of the designed software

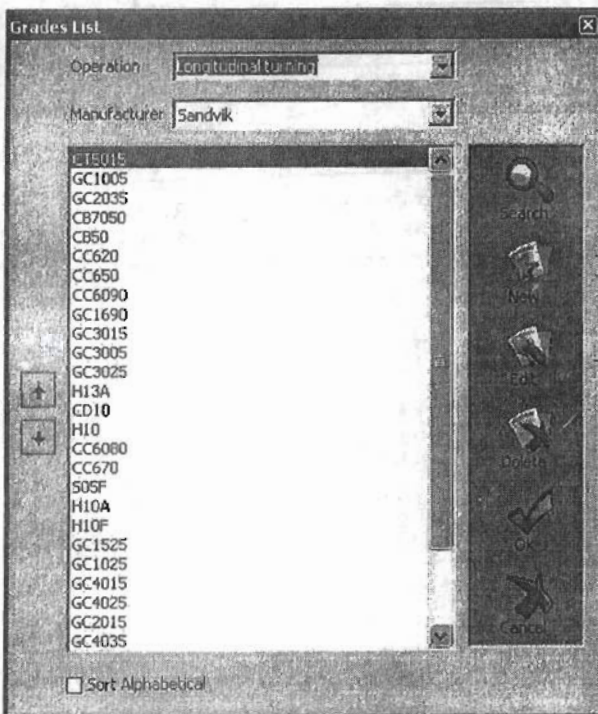


Fig. 5: Grades list windows

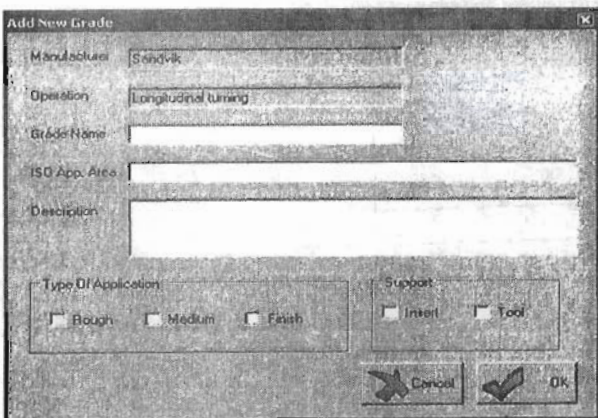


Fig. 6: Add new grade window

The fourth main menu of output (Fig. 7) was designed to calculate the machining time, total production time and cost in the two cases mentioned above. Also a number of windows were designed for different techniques of turning, drilling and milling operations. For example, for any operation done using maximum cutting speed of the tool grades, the user first double clicks the machining time using max. speed submenu, shown in Fig. 7, to display the window shown in Fig. 8. Through this window, the user can select the tool's manufacturer; determine the operation required, material of the workpiece. In addition, the user can enter the values of machine power, efficiency, and so on (Fig. 9) by clicking the next button in this window. Finally, by double clicking the OK button in Fig. 8, the window of the required operation will appear as shown in Fig. 10.

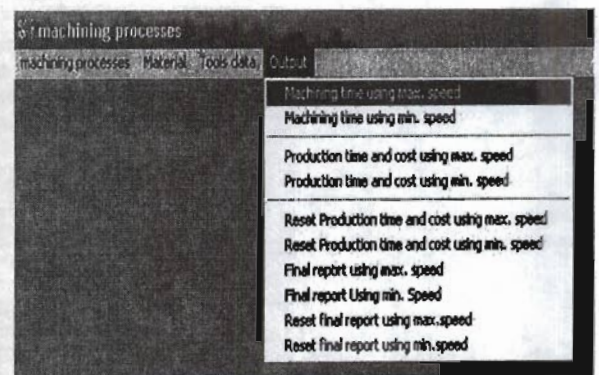


Fig. 7: The output menu and its submenus

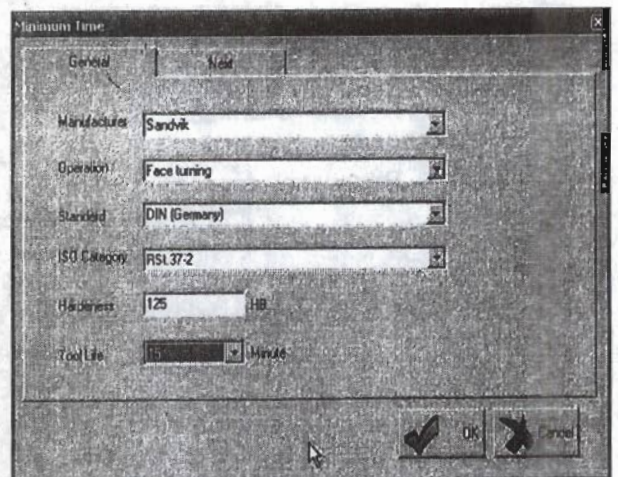


Fig. 8: Minimum time window

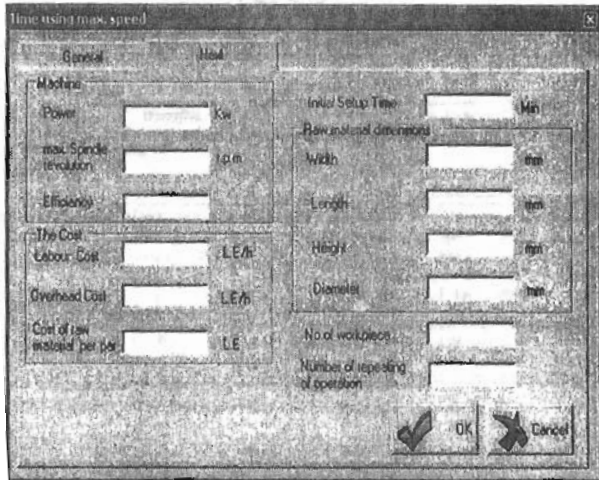


Fig. 9: Next window


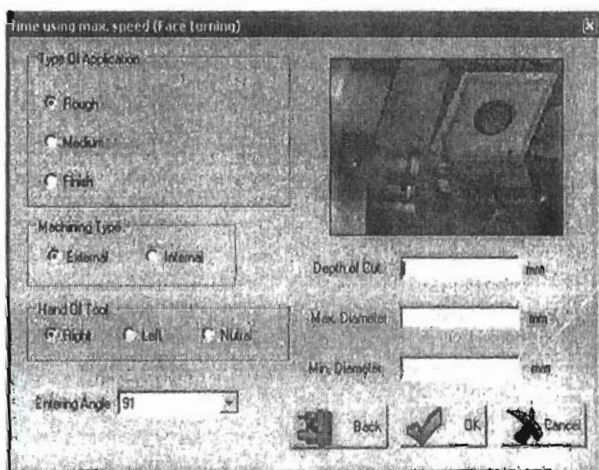


Fig. 10: Face turning window

6. Case study

The product drawing of the case study is shown in Fig. 11. The dimensions of the raw material are 155 mm length and 100 mm diameter. It is required to determine the suitable cutting data, calculate the regular operating time, intermittent operating time, total production time and cost, force, torque and power required for cutting in two cases, the first using minimum tool life and the second using maximum tool life then selecting the suitable tool. There were about twenty steps to manufacture this product including chucking, releasing and chucking, turning, drilling and milling operations. All of these steps appear in detail in the final report. A part of the final report using maximum cutting speed (minimum tool life) for this product is shown in Fig. 12.

The number of each operation is shown in this report.

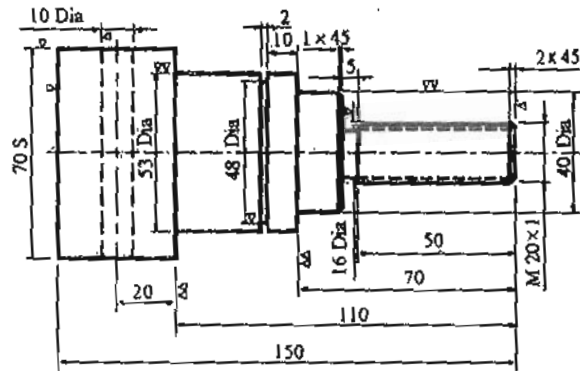

All dimensions are in millimeter
Material code: 1.5662 Hardness = 200 BHN

Fig. 11: Working drawing of the product

Specifications of the machine, material and constants are given below.

Machine tool data:

- CNC turning machine with driven motor of 20 kW
- Max spindle revolutions = 3200 rpm
- Efficiency = 95%

Material data:

- Material code: 1.5662
- Standard reference: W.-nr.
- ISO group: P (High-alloy steel, Annealed)
- Hardness = 200 N/mm²
- Tensile strength = 700 N/mm²

Constants:

- Setup time = 12 min
 - Cost of raw material per part = 200 L.E
 - Labour cost (high expertise) = 13 L.E/h
 - Overhead cost = 2 L.E/h
- In case of using min. cutting speed:
- Labour cost (medium expertise) = 8 L.E/h

7. Results and discussion

For all operations done, the consumption of power for the same feed in the first case using maximum cutting speed (minimum tool life) is greater than that in the second case using minimum cutting speed (maximum cutting speed), so the tool life of the tool grade decreases and the cost of tool grade increases in the first case. The values of force and torque

| Final report using max. speed of the stored grades. | | | | | | | | | |
|---|---------------------------|-------------------------------------|----------|-----------------|--------|-------------------|---|-------------------|------------------|
| Workpiece material | | L5662 | | Standard W.-nr. | | ISO group P | | | |
| Cutting tool | | High-alloy steel | | Hardness 280 | | HBN | | | |
| No. | Operation | Cutting data, force, power and time | | | | Tool grade | | Insert | Tool holder |
| 1 | Chucking | Time 1.5000 min | | | | | | | |
| 1 | Face turning | Cutting speed | 255 | m/min | GC4035 | ISO area | P35 (P30-P40), M35 (M15-M20) | YNRM 16 04 08-PR | DTFNR 3020K16 |
| | | Spindle revolution | 812 | rpm | | Description | CVD-coated carbide grade. The tough substrate allows the grade to handle interrupted cuts at high metal removal | | |
| | | Max. Diameter | 100.0 | mm | | Feed | 0.00 | mm/r | |
| | | Min. Diameter | 0.0 | mm | | Depth of cut | 1.0 | mm | |
| | | Hand of tool | Right | | | No. of passes | 1 | | |
| | | No. of repeating of operation | 1 | | | Force | 4000 | N | |
| | | | | | | Torque | 100000 | N.mm | |
| | | | | | | Power | 17.0 | kW | |
| | | | | | | Time | 0.0000 | min | |
| | | | | | | Tool manufacturer | Sandvik | | |
| | | | | | | Web site | www.sandvik.com | | |
| | | | | | | Local distributor | Egypt | | |
| 3 | Lengthwise turning | Cutting speed | 225 | m/min | GC4035 | | | ENMG 12 04 08-PR | DTFNR 2525M12 |
| | | Spindle revolution | 717 | rpm | | | | | |
| | | Length | 41.0 | mm | | Feed | 0.00 | mm/r | |
| | | Max. Diameter | 100.0 | mm | | Depth of cut | 0.5 | mm | |
| | | Min. Diameter | 19.0 | mm | | No. of passes | 1 | | |
| | | Machining type | External | | | Force | 1000 | N | |
| | | Hand of tool | Right | | | Torque | 30000 | N.mm | |
| | | No. of repeating of operation | 1 | | | Power | 3.8 | kW | |
| | | | | | | Time | 0.0750 | min | |
| | | | | | | Tool manufacturer | Sandvik | | |
| | | | | | | Web site | www.sandvik.com | | |
| | | | | | | Local distributor | Egypt | | |
| 4 | Face milling with endmill | Cutting speed | 325 | m/min | GC4030 | ISO area | P15 (P10-P40) | R390-17 04 16M-PR | R390-640AJJ-170 |
| | | Spindle revolution | 1791 | rpm | | Description | Coated carbide grade for light to heavy milling | | |
| | | Length | 70.0 | mm | | Feed | 0.10 | mm/r | |
| | | Work engagement | 33.5 | mm | | Depth of cut | 14.500 | mm | |
| | | Cutter diameter | 40 | mm | | No. of passes | 1 | | |
| | | Width of cut | 41.0 | mm | | Force | 391323 | N | |
| | | No. of repeating of operation | 4 | | | Torque | 11826463 | N.mm | |
| | | | | | | Power | 11.5 | kW | |
| | | | | | | Time | 0.0687 | min | |
| | | | | | | Tool manufacturer | Sandvik | | |
| | | | | | | Web site | www.sandvik.com | | |
| | | | | | | Local distributor | Egypt | | |
| 5 | Short drilling | Cutting speed | 80 | m/min | 1226 | ISO area | F/M, K | | R324-1000-70-A16 |
| | | Spindle revolution | 3200 | rpm | | Description | PVD-coating. Assure tough coating, also adherence to the substrate and improved resistance to crater wear | | |
| | | Length | 70.0 | mm | | Feed | 0.20 | mm/r | |
| | | Hole diameter | 10.0 | mm | | Force | 1174 | N | |
| | | No. of repeating of operation | 1 | | | Torque | 3871 | N.mm | |
| | | | | | | Power | 3.7 | kW | |
| | | | | | | Time | 0.1183 | min | |
| | | | | | | Tool manufacturer | Sandvik | | |
| | | | | | | Web site | www.sandvik.com | | |
| | | | | | | Local distributor | Egypt | | |

Fig. 12: Apart of the final report using minimum tool life

are the same in the two cases. The calculated machining time in the first case is less than that in the second case because of using tool grades that gives maximum cutting speed. This means that about 34% of the total production time can be saved by using maximum cutting speed (minimum tool life) of the available tool grade, if compared with the case of using minimum cutting speed (maximum tool life). Similarly, about 28% of the total production cost can be saved by using minimum cutting speed (maximum tool life) of the available tool grade, if compared with the case of using maximum cutting speed (minimum tool life).

8. Conclusion

In this paper, a software has been developed to store the cutting data, different types of tool grades, inserts and tool holders suitable for each operation of different machining processes in a database. Through a user friendly GUI, the

user can select the suitable cutting data, tool grade, insert and tool holders for each operation. The software is capable of calculating the machining time, force, torque, power, total production time and cost in two cases: (a) minimum tool life, (b) maximum tool life. In both cases, a final report including all the operations done, machining time, force, torque, power, the suitable tool grade, insert and tool holder for each operation can be obtained and printed.

The following points can be concluded:

1. According to the results shown in the case study, about 34% of the total production time can be saved by using minimum tool life (maximum cutting speed of the available tool grade).
2. On the other hand, about 28% of the total production cost can be saved by using

maximum tool life (minimum cutting speed of the available tool grade).

3. The software saves a lot of time in selecting the suitable tool grade, insert and tool holders and in calculating the machining time, force torque, power and total production time and cost for each operation.

References

- [1] Metcut Research Associates Inc. Machining Data Handbook, 3rd ed., vols. 1-2, Cincinnati, 1980.
- [2] ASM INTERNATIONAL Handbook Committee, Metals Handbook, 9th ed, Vol 16, USA, March, 1989.
- [3] Sandvik Coromant, Turning tools catalogue, Sandvik Coromant, C-1000:8-ENG/02, Sweden, 2002.
- [4] Sandvik Coromant, Rotating tools catalogue, Sandvik Coromant, C-1100:8-ENG/02, Sweden, 2003.
- [5] Mitsubishi Material Corporation, Mitsubishi carbide catalogue, Mitsubishi Material Corporation, C001E, 2004-2005.
- [6] M.V. Ribeiro and N.L. Coppini, An applied database system for the optimization of cutting conditions and tool selection, Journal of Materials Processing Technology, Vol. 92-93, 1999, pp. 371-374.
- [7] S.H. Yeo, M. Rahman and V.C. Venkatesh, Development of an expert system for machinability data selection, Journal of Mechanical Working Technology, Vol. 17, 1988, pp. 51-60.
- [8] K. Hashmi, M.A. El Baradie and M. Ryan, Fuzzy-logic based intelligent selection of machining parameters, Journal of Materials Processing Technology, Vol. 94, 1999, pp. 94-111.
- [9] K. Hashmi, I.D. Graham and B. Mills, Fuzzy logic based data selection for the drilling process, Journal of Materials Processing Technology, Vol. 108, 2000, 55-61.
- [10] S.V. Wong and A.M.S. Hamouda, A fuzzy logic based expert system for machinability data-on-demand on the Internet, Journal of Materials Processing Technology, Vol. 124, 2002, pp. 57-66.
- [11] S.V. Wong, Y.H. Peng and X.Y. Li, Fuzzy-grey prediction of cutting force uncertainty in turning, Journal of Materials Processing Technology, Vol. 129, 2002, pp. 663-666.
- [12] S.V. Wong and A.M.S. Hamouda, The Development of an online knowledge-based expert system for machinability data selection, Knowledge-Based Systems, Vol. 16, 2003, pp. 215-229.
- [13] J. Wang, T. Kuriyagawa, X.P. Wei and D.M. Guo, Optimization of cutting conditions for single pass turning operations using a deterministic approach, International Journal of Machine Tools & Manufacture, Vol. 42, 2002, pp. 1023-1033.
- [14] H. Juan, S.F. Yu and B.Y. Lee, The optimal cutting-parameter selection of production cost in HSM for SKD61 tool steels, International Journal of Machine Tools & Manufacture, Vol. 43, 2003, pp. 679-686.
- [15] R. Mookherjee and B. Bhattacharyya, Development of an expert system for turning and rotating tool selection in a dynamic environment, Vol. 113, 2001, pp. 306-311.
- [16] Mikell P. Groover, Fundamentals of modern manufacturing, John Wiley & Sons, Inc., New York, 2002.
- [17] M. Ttoouel-Rad and I. M. Bidhendil, On the optimization of machining parameters for milling operations, Int. J. Mach. Tools Manufact. Vol. 37, No. 1, 1997, pp. 1-16.