

6-1-2020

Treatment of Refinery Plants Oily Wastewaters by Saponification/Coagulation Process.

I. Rashed

Mathematical and Physical Engineering Department., Faculty of Engineering., Mansoura University., Mansoura., Egypt.

A. Al-Sarawy

Mathematical and Physical Engineering Department., Faculty of Engineering., El-Mansoura University., Mansoura., Egypt.

M. El-Halwany

Mathematical and Physical Engineering Department., Faculty of Engineering., El-Mansoura University., Mansoura., Egypt.

B. Abd El-Rahman

Mathematical and Physical Engineering Department., Faculty of Engineering., El-Mansoura University., Mansoura., Egypt.

Follow this and additional works at: <https://mej.researchcommons.org/home>

Recommended Citation

Rashed, I.; Al-Sarawy, A.; El-Halwany, M.; and Abd El-Rahman, B. (2020) "Treatment of Refinery Plants Oily Wastewaters by Saponification/Coagulation Process.," *Mansoura Engineering Journal*: Vol. 36 : Iss. 2 , Article 10.

Available at: <https://doi.org/10.21608/bfemu.2020.122807>

This Original Study is brought to you for free and open access by Mansoura Engineering Journal. It has been accepted for inclusion in Mansoura Engineering Journal by an authorized editor of Mansoura Engineering Journal. For more information, please contact mej@mans.edu.eg.

معالجة السوائل الزيتية الناتجة عن مصانع التكرير بطريقة التصبن والترويب
**TREATMENT OF REFINERY PLANTS OILY WASTEWATERS BY
 SPONIFICATION/COGULATION PROCESS**

*I.G. Rashed, *A.A. Al-Sarawy, *M.M. El-Halwany and *B.A. Abd El-Rahman

*Mathematical and Physical Engineering Department, Faculty of Engineering, Mansoura University, Egypt.

الملخص العربي

تكنولوجيا معالجة مياه الصرف الصناعي تتنوع من طرق بسيطة إلى طرق متقدمة اعتماداً على مصدر المياه والخصائص المطلوبة بعد معالجتها. وتهدف هذه الدراسة إلى تطبيق المعالجة الكيميائية لسوائل الصرف الصناعي لوحدات التكرير أو التي تحتوي على الزيوت من خلال محاولة تطبيق مفهوم التصبن باستخدام قلوي (NaOH) ثم تطبيق عملية الترويب والترسيب بعد عملية التصبن باستخدام بعض المروبات مثل (Alum, Ferrous sulfate, Ferric chloride) وكذلك تطبيق عملية الترويب والترسيب منفردة للتخلص من الزيوت الموجودة بمياه الصرف الصناعي. وقد تم قياس كفاءة المعالجة عن طريق تحديد احتياج الأكسجين الكيميائي (COD) حيث أوضحت النتائج من خلال المقارنة بين العمليات الثلاث (التصبن ثم الترسيب، التصبن ثم الترويب والترسيب، الترويب ثم الترسيب) أن أفضل تركيز للصوديوم هيدروكسيد المستخدم في عملية التصبن هو 10 مجم/لتر، كما أن عملية الترويب والترسيب بعد التصبن أعطت كفاءة أعلى للتخلص من الزيوت بمياه الصرف الصناعي حيث وصلت نسبة الإزالة إلى 84 % تقريباً عند استخدام كلوريد الحديد بتركيز 40 ملليجرام / لتر.

Abstract

The treatment of industrial wastewater technology is varies from simpler technology to the more advanced technology. This study was based on evaluation, of the possibility of applying saponification/coagulation followed by sedimentation to reduce oils content from refinery plants oily wastewaters. Sodium hydroxide solution (strong base) was used as saponifier for oily wastewater. Ferrous sulfate; ferric chloride and alum were tested by jar test analysis as coagulants to determine the best removal% of COD. The results show that sodium hydroxide, 1 molar concentration; with dosage 10 ml was more efficient for saponification. The comparison between the three different types of treatments methods (sponification followed by sedimentation, sponification followed by cogulation with sedimentation and cogulation followed by sedimentation) indicated that ferric chloride with 40 mg/l dosage is more efficient for coagulation and sedimentation treatment after saponification of refinery plants wastewaters & give a removal efficiency of about 84%.

Key Words: Saponification; Coagulation; Sedimentation; Chemical oxygen demand (COD); Coagulants.

1. Introduction

Wastewater treatment refers to the processes used to treat or remove contaminants (such as soluble organic matter, suspended solids, pathogenic organisms, and chemicals) from industrial waters that are released into the environment [1]. Major industrial sources of oily wastewater include petroleum refining, metal manufacturing, machining and food processing [2]. Removing oil and grease is important because it is deleterious to the treatment plant's effluent and it can clog and reduce the performance of filters and other treatment equipment [3]. Recent trends indicate that there will be new requirements to monitor and perhaps regulate the emerging groups of contaminants [4]. New developments in the area of membranes filtration, disinfection/oxidation methods, ion exchange resins, sorption technologies, as well as water management methods utilize information and control capabilities [5]. Thorough knowledge of the oils physicochemical properties and a better understanding of oil-containing water treatment processes would permit improvements in the existing methods and the development of new treatment techniques [6]. Chemical aids, or coagulants, are used to allow individual droplets of emulsified oil to agglomerate into a larger floc, which is more easily separated from the water [7]. Nano filtration membrane based water purifier was developed without the need for a storage tank [8]. A combination water filter tank was designed to remove settle able solids from water [9]. A drinking water filter was developed to remove

major contaminants from tap water and other drinking water sources, and adjust pH [10]. Ion exchange filter system was developed to reduce ions contained in a liquid medium used in fuel cell system [11]. A method was developed for oxidizing carbon absorbable organic compounds in controlled manner with a bed of activated carbon [12]. A system was developed to enable a plant operator to assess biomass development, determine the optimum flushing rates and distributor speed options [13]. Wastewater treatment system using oyster shells was developed as the biological growth media in the aeration chamber [14]. A new method was developed for separating dissolved materials (i.e., organic and inorganic solids and volatile constituents) from aqueous solutions [15]. There are two types of soap making, cold-process and hot-process in which heat may be required for saponification [16]. This study deals with chemical means coagulation or saponification followed by coagulation for removing oil from industrial wastewater.

2. Material and Methods

2.1. Experimental protocol

Two liters volume of synthetic oily wastewater similar to that obtained from refinery plants wastewaters, was drawn into a beaker and placed on a magnetic stirrer to mix for a period of 30 minutes then diluted by 20 liters of pure water. The pH of synthetic oily wastewater (emulsion) was 6.3 and COD was about 4600 mg/l.

2.2. Experimental Design

Three sets of experiments were performed in this study. the first set, test

of saponification, proper amount of strong base of sodium hydroxide (5g) was measured on an analytical balance & then dissolved in one liter of distilled water and added to 500 ml of emulsion cylinders at various concentrations (10, 20, 30, 40, 50ml) using water bath apparatus at 80 °C. Then the samples were left for another 30 minutes for cooling. The samples were then analyzed for pH, and COD. In the second sets of experiments, test for coagulation, coagulants with various concentration (20, 30, 40, 50, 60 ml) were mix for a period of 30 minutes using jar test to ensure that the coagulant was completely dissolved, then sedimentation took place. Complete settling was achieved after 30 minutes. The treated wastewater was then analyzed for PH and COD. In the third set of experiments, test of saponification/coagulation, coagulation was carried out after saponification to determine the optimum concentrations of NaOH, and coagulant at various concentrations.

3. Results and Discussion

3.1. Determination of optimum NaOH for saponification of oily wastewater

The highest COD removal efficiency was about 48% and 54% when the concentration was 10 ml and 20 ml of sodium hydroxide solution respectively. Fig. (1) and Fig. (2) shows the effect of NaOH added on total dissolved solids and on removal of the oil from the treated portion of industrial waste water as indicated by COD value at different dose of sodium hydroxide solution. TDS increases from 3100 mg/l to 14770 mg/l due to adding of sodium hydroxide solution up to 50 mg/l. It can be shown that a NaOH concentration of 10ml was

enough to achieve a residual COD value of about 2300 mg/l (see fig. 2).

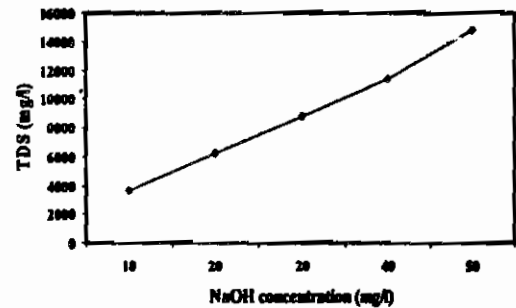


Fig. (1): Effect of NaOH concentration on TDS for oily wastewater

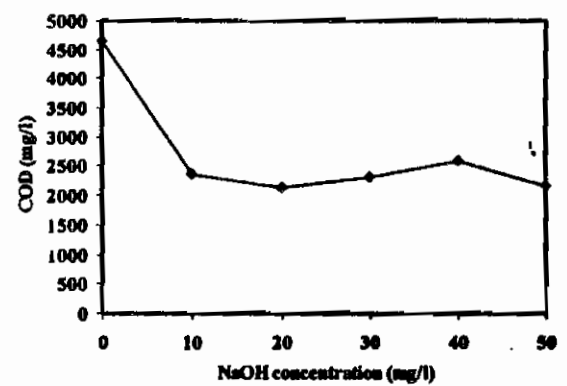


Fig. (2): Effect of NaOH concentration on COD for oily wastewater

3.2 Saponification/Coagulation of Oily Wastewater

Fig. (3) shows that their effect of removal efficiency of TDS of coagulants type on coagulation/sedimentation experiments of the treated industrial wastewater. Percent removal varied between 87% and 77% at 40 mg/l of aluminum sulfate and 30 mg/l of Ferric chloride respectively. Also, COD removal efficiency of the treated portion of oily wastewater was 84%, 81% and 76% for Ferric chloride, ferrous sulfate, and Aluminum sulfate respectively (Fig.4). The concentration of all reagent wa 40 mg/l at a maximum removal efficiency.

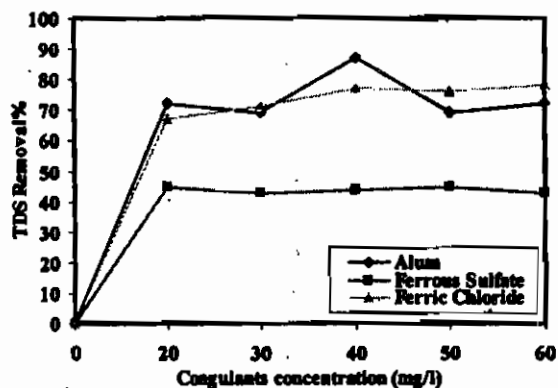


Fig.(4): Effect of coagulant concentration on TDS removal% after saponification of oily wastewater.

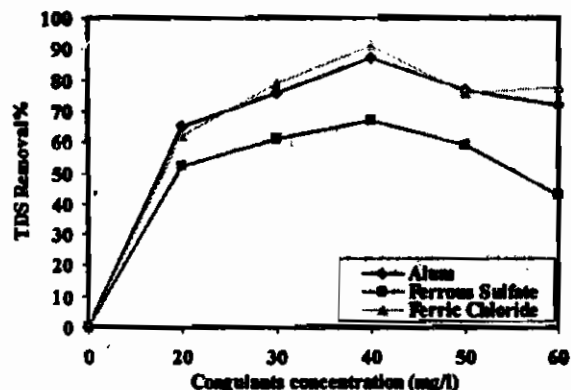


Fig. (5): Effect of coagulant concentration on TDS removal%.

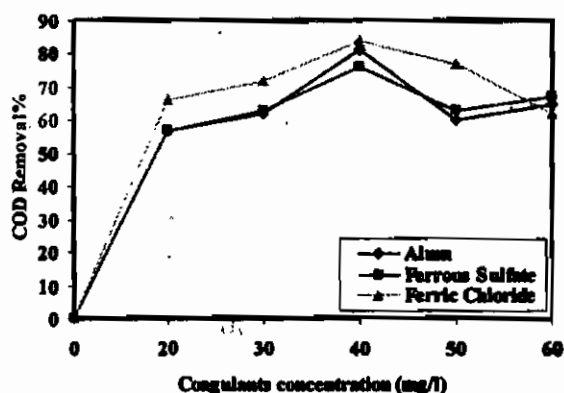


Fig.(4): Effect of coagulant concentration on COD removal% after saponification of oily wastewater.

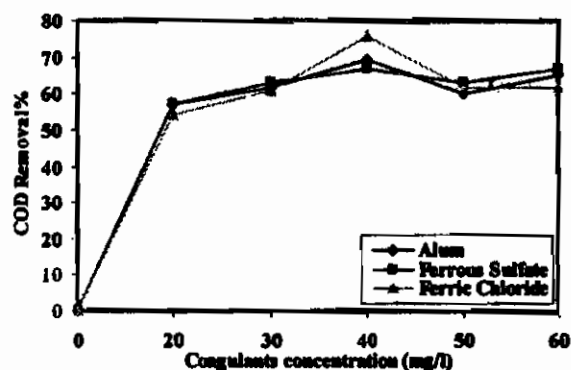


Fig. (6): Effect of coagulant concentration on COD removal%.

3.3 Coagulation and Sedimentation of Oily Wastewater

Fig.(5) shows that Increasing the coagulant concentration from 30 to 60 mg/l decreased the total solids of the treated wastewater by 91, 87 % for Ferric chloride, aluminum sulfate at chemical concentration of 40mg/l, and for Ferrous sulfate the reduction of total solids of the treated wastewater was 67% at chemical concentration of 40mg/l.

Fig.(6) shows that Ferric chloride was the most effective coagulating agent. It reduced the COD of the wastewater by 75.6% (compared to 69.6% and 66.7% for aluminum sulfate and ferrous sulfate), respectively.

4. Conclusions:

From the study we can conclude that:-

- Sodium hydroxide at a dosage of 10 ml with a concentration of 1 molar solution was found to be the most effective for saponification.
- Ferric chloride at a dosage of 40 mg/l was found to be the most effective coagulant for coagulation after saponification processes.
- Finally, saponification/coagulation processes can be used as a preliminary treatment for the oily wastewater to reduce oil content.

5. References

1. Industrial Wastewater Treatment Sources; EPA-430-F-09-008; (2009).

2. Chen-Lu Y.; "Electrochemical Coagulation for Oily Water Demulsification, Separation and Purification Technology"; 54, 388-395, (2007).
3. Siemens, A.G; "Water Technologies"; (2008).
4. Berrin, T.; "New Technologies for Water and Wastewater Treatment: A Survey of Recent Patents on Chemical Engineering"; 1, 1, 17-26, (2008).
5. Franceschi, M.T.; Girou, A.; Carro-Diaz, A.M.; Maurette, M.T. and Puech-Costes, E.; "Optimization of the coagulation process of raw water by optimal design method"; Wat. Res, 36, 3561-3572, (2002).
6. M.M.R.; "Treatment of Refinery Wastewater Using Cross Flow Membrane Bioreactor (CF-MBR)", (2004).
7. Department of Defense; "Design: Industrial and Oily Wastewater Control"; U.S. Army Corps of Engineers, UFC 4-832-01N, (2004).
8. Yoon, S.R.; Kim, S.S.; Hyung, H. and Kim, Y.H.; " Domestic Nanofiltration Membrane Based Water Purifier Without Storage Tank"; United States Patent, 20056841068, (2005).
9. Chang, T.S. and Chuang, S.C.; "Combination Water Filter Tank"; United States Patent, 20006132609, (2000).
10. Archer, V.L.; "Drinking Water Filter Used with Tap Water and other Water Sources"; United States Patent, 20077156994, (2007).
11. Takemoto, S. and Suzuki, K.; "Ion Exchange Filter Apparatus"; United States Patent, 20067097763, (2006).
12. McLaughlin, H.S.; "Method for Destruction of Organic Compounds by Co-Oxidation with Activated Carbon"; United States Patent, 20077199069, (2007).
13. Ruppel, M.J.; "Apparatus Determining Weight and Biomass Composition of a Trickling Filter"; United States Patent, 20077195707, (2007).
14. Okamoto, R.; Komurasaki, M. and Niki, H.; "Wastewater Purifying Apparatus; United States Patent, 20046808622, (2004).
15. Titmas, J.A.; "Method for Extraction of Dissolved Trace Materials from Solution"; United States Patent, 20077189328, (2007).
16. Franceschi, M.T.; Girou, A.; Carro-Diaz, A.M.; Maurette, M.T. and Puech-Costes, E.; "Optimization of the coagulation process of raw water by optimal design method"; Wat. Res, 36, 3561-3572, (2002).