

9-8-2020

## Comparative Analysis of the Environmental Impacts of Solar Photo-Fenton and Photocatalysis Methods for Treatment of Phenolic Wastewater on Life-Cycle Basis.

Mona younis

*Civil Engineer, Dakahlia Potable Water and Sanitary Drainage Company, Egypt, monamagdy00@gmail.com*

Mohamed Gar Alalam

*Lecturer, Public Works Dept., Faculty of Engineering, Mansoura University, Egypt, m\_gar\_alalm@yahoo.com*

Hisham El-Etriby

*Professor of Public Works, Faculty of engineering, Mansoura University, Egypt, eletribyhk@yahoo.com*

Follow this and additional works at: <https://mej.researchcommons.org/home>

---

### Recommended Citation

younis, Mona; Gar Alalam, Mohamed; and El-Etriby, Hisham (2020) "Comparative Analysis of the Environmental Impacts of Solar Photo-Fenton and Photocatalysis Methods for Treatment of Phenolic Wastewater on Life-Cycle Basis.," *Mansoura Engineering Journal*: Vol. 45 : Iss. 2 , Article 3.  
Available at: <https://doi.org/10.21608/bfemu.2020.111383>

This Original Study is brought to you for free and open access by Mansoura Engineering Journal. It has been accepted for inclusion in Mansoura Engineering Journal by an authorized editor of Mansoura Engineering Journal. For more information, please contact [mej@mans.edu.eg](mailto:mej@mans.edu.eg).



# Comparative analysis of the environmental impacts of solar photo-Fenton and photocatalysis methods for treatment of phenolic wastewater on life-cycle basis

## مقارنة تحليلية للتأثيرات البيئية لطريقة فنتون الضوئية الشمسية و طريقة التحفيز الضوئي لمعالجة مياه الصرف الملوثة بالفينول على أساس دورة الحياة

Mona Magdy, Mohamed Gar Alalm and Hisham Kh. El-Etriby

**KEYWORDS:**  
*Solar photo-Fenton;*  
*photocatalysis;*  
*Phenol;*  
*LCA*

*المخلص العربي:-* في هذا البحث تمت المقارنة بين الأثر البيئي الناتج عن معالجة مياه الصرف الملوثة بالفينول بطريقة فنتون الضوئية الشمسية وطريقة التحفيز الضوئي الشمسي. النموذج الذي تم دراسته كان 100 م<sup>3</sup>/يوم من مياه الصرف الصحي الملوثة بـ 100 مجم/ لتر من الفينول. تم عمل مقارنة بين كلا من المواد والطاقة المطلوبة لعملية الإنشاء والتشغيل لطريقة فنتون الضوئية الشمسية و طريقة التحفيز الضوئي الشمسي. تم استخدام طريقة "Impact 2002" لدراسة التأثيرات البيئية المختلفة. نتائج تقييم الأداء البيئي لطريقتي المعالجة لمياه الصرف الصحي الملوثة بالفينول اظهرت ان طريقة فنتون الضوئية الشمسية أقل ضررا للبيئة من طريقة التحفيز الضوئي الشمسي.

**Abstract—** This research aims to compare the environmental performance of two methods for phenolic wastewater treatment. The two methods are solar photo-Fenton and solar photocatalysis by TiO<sub>2</sub>. A case study of 100 m<sup>3</sup>/d of wastewater contaminated with 100 mg/l of phenol was considered, whereas the functional unit was one cubic meter of treated wastewater. The life cycle inventory included the materials and energy required in both construction and operating phases. The effects of the by-products from phenol oxidation have been considered. The method

"Impact 2002" was employed to calculate the different impacts of the two methods. The results showed that solar photo-Fenton is causing less environmental impacts due to the lower effects of its chemical reagents.

### I. INTRODUCTION

PHENOL is a very harmful and toxic material that is resulted from a lot of industries as plastics, pharmaceuticals, paint, and textiles. Biological treatment was not an effective method for phenolic wastewater treatment. Accordingly, chemical treatment methods were considered in recent studies. It is worthy to note that the phenol removal by using chemical methods was the main indicator of the treatment performance, whereas, the trade-offs for other environmental impacts resulted from chemical methods were not considered in the literature.

*Received: (4 November, 2019) - Revised: (2 June, 2020) - Accepted: (3 June, 2020)*

Mona Magdy, Civil Engineer, Dakahlia Potable Water and Sanitary Drainage Company, Egypt, (email: [monamagdy00@gmail.com](mailto:monamagdy00@gmail.com))

Mohamed Gar Alalm, Lecturer, Public Works Dept., Faculty of Engineering, Mansoura University, Egypt, (email: [m\\_gar\\_alalm@yahoo.com](mailto:m_gar_alalm@yahoo.com))

Hisham Kh. El-Etriby Professor, Public Works Dept., Faculty of Engineering, Mansoura University, Egypt, (email: [eltribykh@yahoo.com](mailto:eltribykh@yahoo.com))

Life cycle assessment (LCA) is a universal technique for determination of specific environmental impacts from the start of the treatment process to the end (i.e. cradle to grave) [1][2]. LCA could be utilized as a decision-making tool for waste management because it offers elaborate insights into the environmental impacts of different alternatives including the contribution of all incorporated activities [3].

Consequently, this study aims to investigate and compare the environmental impacts of two common chemical methods for phenolic waste treatment (i.e. photo-Fenton and photocatalysis) [4]–[6]. The calculation of the environmental impacts on different categories was performed on life cycle assessment (LCA) basis [7]. The determination and interpretation of the environmental impacts was carried out using Simapro 7 software. The database Ecoinvent 2 was used to identify the contribution of materials and processes to the environmental impacts and comparing them with each other [8].

**II. METHODOLOGY**

*A. Goal and scope*

This research aims to study and compare the environmental impacts of solar photo-Fenton and TiO<sub>2</sub> photocatalysis. As shown in Table 1, the used reactor in the solar photo-Fenton method is compound parabolic collectors 700m and the time of reaction is 80 min [9]. In solar photocatalysis, the used reactor is composed of compound parabolic collectors of 2060 m length and the time of reaction is 250 min [10]. In solar photo-Fenton method, the percentage of phenol removal was 99%, whereas in solar photocatalysis it was 80%.

TABLE I  
THE TWO TECHNOLOGIES FOR PHENOLIC WASTEWATER TREATMENT

technology	Reactor	Time of reaction (min)	Percentage of phenol removal	Reference
Solar photo-Fenton	Compound parabolic collectors 700 m	80	99%	[9]
Solar photocatalysis by TiO <sub>2</sub>	Compound parabolic collectors 2060 m	250	80%	[10]

*B. Reactors*

Photo-Fenton and photocatalysis processes reactors as illustrated in Fig. 1 [10].

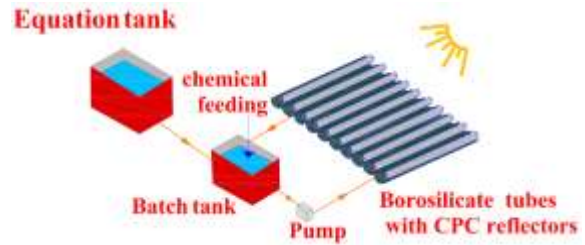


Fig. 1. Photo-Fenton and photocatalysis processes reactors.

*C. Life cycle inventory*

The functional unit which used in the two methods was 1 m<sup>3</sup> of the phenol solution with a concentration of 100 mg/l. The construction and operation phases were taken into account. The study boundary included the equalization tank, treatment reactor, chemicals addition, energy consumption, the remaining transformation products, sludge in the effluent, and the emitted CO<sub>2</sub> which is emitted due to the oxidation of phenol. The different inputs, outputs, and energy forms are illustrated in Fig. 2 [9],[10]. The life span of the reactors has been assumed as 20 years includes equalization and chemical feeding tanks. The life cycle inventories have been estimated based on the hydraulic designs of all reactors, which have been provided the reactor sizing, and the amounts of materials needed in the construction phase. A summary of the inventories of the two methods of treatment is illustrated in Table II [9],[10].

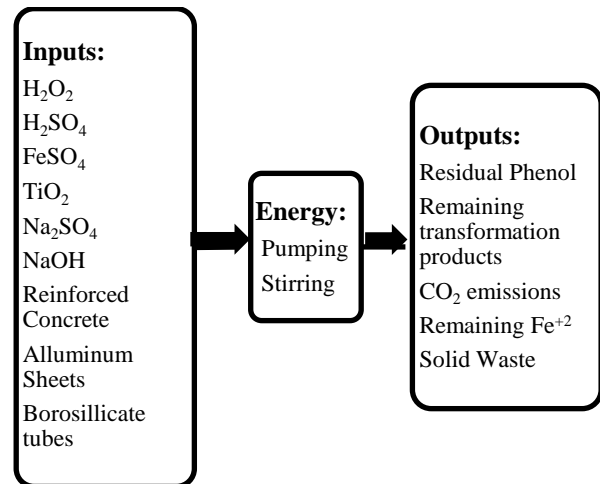


Fig. 2. Life cycle inventory

TABLE II  
LIFE CYCLE INVENTORY

materials	UNIT	Solar Photocatalysis By TiO <sub>2</sub>	Solar Photo-Fenton
<b>Inputs:</b>			
Hydrogen peroxide	kg	-	1.5
Sulfuric acid	gm	0.3	45
Ferrous sulphate	gm	-	490
Titanium dioxide	kg	0.4	-
Sodium hydroxide	gm	0.3	50
Reinforced-Concrete	gm	17	17
Glass tube, borosilicate	gm	1.25	0.45
aluminum sheets	gm	0.2	0.06
<b>Process:</b>			
mixing	kw	0.38	0.13
pump	kw	6.6	2.2
<b>outputs:</b>			
Fe <sup>+2</sup>	gm	-	10
Phenol	gm	20	0.2
CO <sub>2</sub>	gm	60	80
Catechol	gm	7	8
Hydroquinone	gm	2	2.5
Formic acid	gm	32	40
Benzoquinone	gm	3	4

Mixing is consumed by  $E = G^2 \mu V T$

Where E: the energy consumption, G: the average velocity gradient inside the tank, V: the tank volume, and T: the retention time of wastewater.

The friction head loss in the tubes calculated by

$$Q = 0.355 C D^{0.63} A \left[ \frac{H_f}{L} \right]^{0.54}$$

and The bending head loss was calculated by

$$H_b = \frac{L}{10} \times k_b \frac{v^2}{2g}$$

and the consumed energy calculated by

$$E = \frac{\gamma Q H_t T}{75 \eta_1 \eta_2} \times \frac{745.7 \text{ Watt}}{1 \text{ Horse Power}}$$

Where Q: flow rate inside the tubes, C: the friction coefficient of glass, D: the diameter of the pipes, A: the cross-sectional area of the pipes, H<sub>f</sub>: the friction head loss, L: the length of the pipes, H<sub>b</sub>: the bending head loss, v: the water velocity inside the pipes, g: the acceleration due to the gravity, γ: the specific weight of water, H<sub>t</sub>: total losses (H<sub>f</sub>+ H<sub>b</sub>), and η<sub>i</sub>: operation coefficients.

#### D. Phenol transformation

The phenol is transformed to catechol and hydroquinone [10],[11]. Then, hydroquinone and catechol are transformed into other components [12]. Some of these components were transformed into water and carbon dioxide so they weren't assumed as emissions because water and carbon dioxide have no impacts in the Ecoinvent database.

#### E. LCA method

The environmental impacts were calculated using IMPACT 2002 method [13]. The categories impacts as carcinogenic,

Non-carcinogenic, respiratory inorganics, Ionizing radiation, ozone layer depletion, respiratory organics, Aquatic ecotoxicity, Terrestrial ecotoxicity, Terrestrial acid and land occupation, aquatic acidification, aquatic eutrophication, global warming, non-renewable energy, Mineral extraction was calculated using the Ecoinvent 2.2 database [14]. The SimaPro® 7.1 software was used to analyze the impacts.


### III. RESULTS AND DISCUSSION

#### A. Comparison of methods

Table 3 shows the environmental impacts of solar photo-Fenton and TiO<sub>2</sub> photocatalysis. A comparison by simapro7 between the environmental impacts of solar photo-Fenton and TiO<sub>2</sub> photocatalysis are shown in Fig.4 (a) and Fig.4 (b). The TiO<sub>2</sub> photocatalysis process causes a lot of harmful environmental emissions so solar photo-Fenton is better to the environment than TiO<sub>2</sub> photocatalysis. In TiO<sub>2</sub> photocatalysis method, the results of carcinogenic, respiratory organics, aquatic eutrophication, Mineral extraction categories are lower than their results in solar photo-Fenton but the results from other categories as Non-carcinogenic, respiratory inorganics, Ionizing radiation, ozone layer depletion, Aquatic ecotoxicity, terrestrial ecotoxicity, Terrestrial acid and land occupation, aquatic acidification, global warming, non-renewable energy are higher in TiO<sub>2</sub> photocatalysis process. So, solar photo-Fenton process is better in phenolic wastewater treatment. The same results were shown in single score impacts comparison by EDIP 2003 as in Fig. 5.


TABLE III  
ENVIRONMENTAL IMPACTS OF DIFFERENT TECHNOLOGIES

Impact category	UNIT	Photo-Fenton	Photo-catalysis
carcinogens	kg C <sub>2</sub> H <sub>2</sub> Cl eq	0.707	0.0247
Non-carcinogens	kg C <sub>2</sub> H <sub>2</sub> Cl eq	0.0344	0.035
respiratory inorganics	kg PM <sub>2.5</sub> eq	0.00145	0.00251
Ionizing radiation	Bq C-14 eq	404	1.06E3
Ozone layer depletion	kg CFC-11 eq	7.64E-7	1.82E-6
respiratory organics	kg C <sub>2</sub> H <sub>4</sub> eq	0.0014	0.000931
Aquatic ecotoxicity	kg TEG water	982	1.93E3
Terrestrial ecotoxicity	kg TEG soil	21.2	26.6
Terrestrial acid	kg SO <sub>2</sub> eq	0.0283	0.0553
land occupation	M <sub>2</sub> org.arable	0.0932	0.256
aquatic acidification	Kg SO <sub>2</sub> eq	0.01	0.0204
aquatic eutrophication	Kg PO <sub>4</sub> p-lim	0.000174	0.000146
global warming	Kg CO <sub>2</sub> eq	2.4	3.03
non-renewable energy	MJ primary	72.7	127
Mineral extraction	MJ surplus	0.0596	0.031

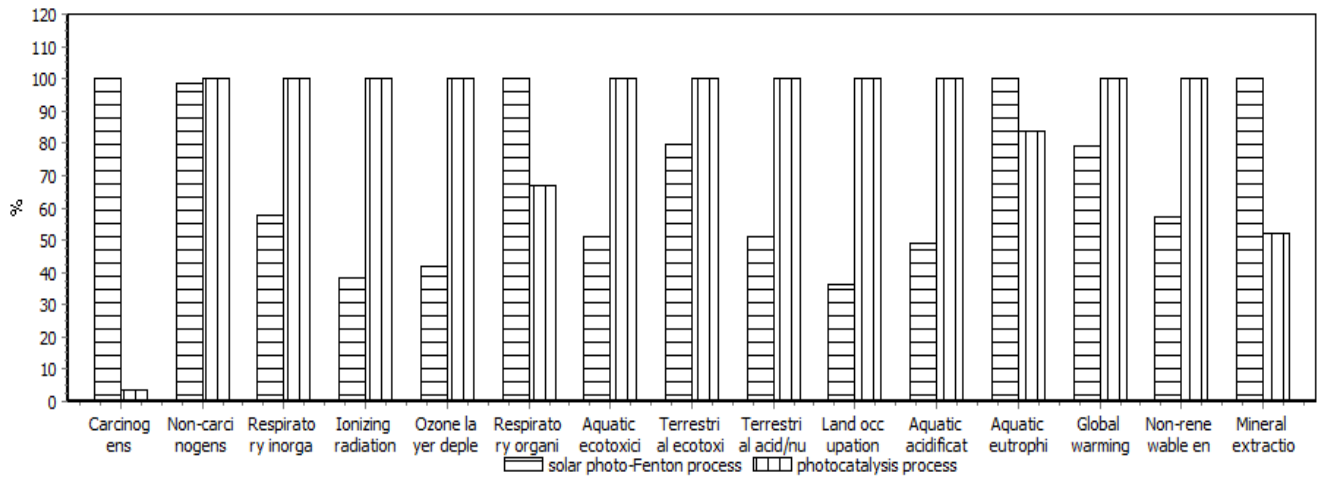


Comparing 1 p 'solar photo-Fenton process' with 1 p 'photocatalysis process'; Method: IMPACT 2002+ V2.05 / IMPACT 2002+ / characterization

Fig. 4. Comparison between solar photo-Fenton process and photocatalysis process; (a) characterization,

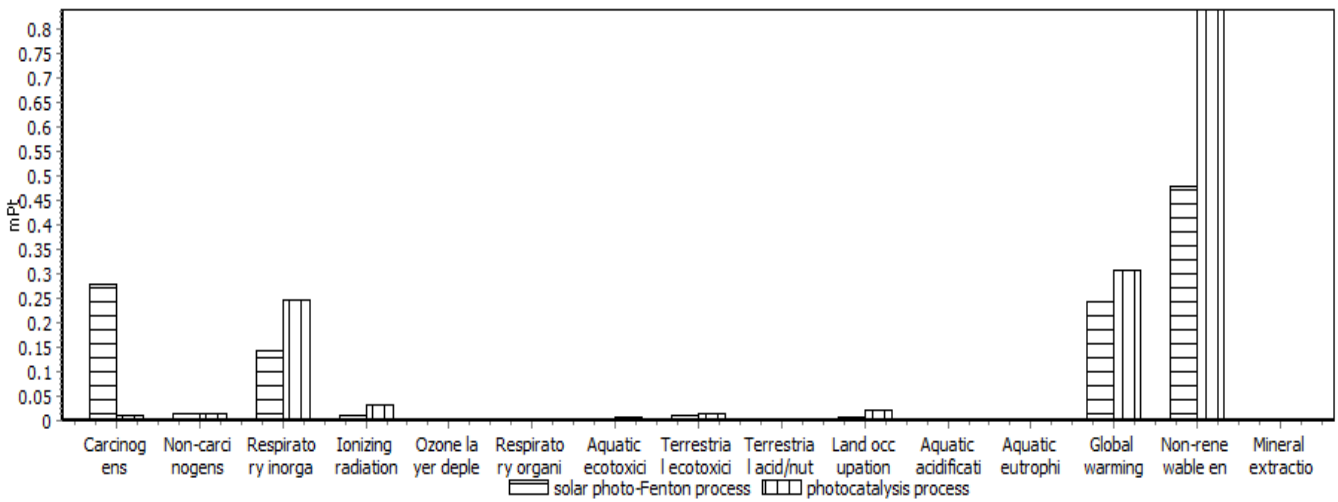

Comparing 1 p 'solar photo-Fenton process' with 1 p 'photocatalysis process'; Method: IMPACT 2002+ V2.05 / IMPACT 2002+ / weighting

Fig. 4. Comparison between solar photo-Fenton process and photocatalysis process; (b) weighting

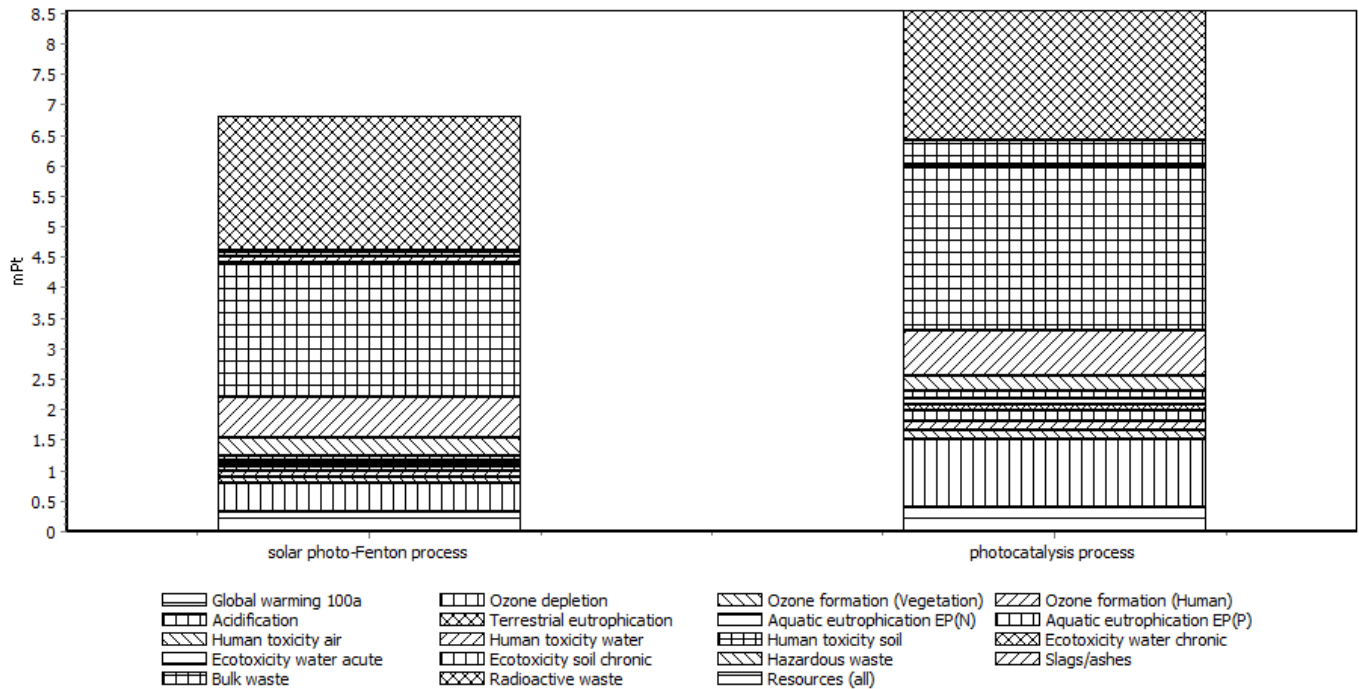

Comparing 1 p 'solar photo-Fenton process' with 1 p 'photocatalysis process'; Method: EDIP 2003 V1.01 / Default / single score

Fig. 5. Single score impacts by EDIP 2003

**B. Interpretation of result**

**1) Solar Photo-Fenton**


The Photo-Fenton process is the most eco-friendly process because of using solar radiation as an energy source. And its high performance for removal of phenol leads to lower emissions in the effluent. Electricity caused most impact categories as shown in Fig.6 (a) [9].

**2) TiO<sub>2</sub> photocatalysis**

TiO<sub>2</sub> is the main responsible for most impact


categories [15]. TiO<sub>2</sub> causes more than 75% to the results of carcinogens, Non-carcinogens, Respiratory inorganics, Respiratory organics, Terrestrial ecotoxicity, Terrestrial acid, Aquatic acidification and Mineral extraction. The residual phenol is the main contributor to Ionizing radiation, Ozone layer depletion, Aquatic ecotoxicity, and land occupation. Other materials contribute to impact categories but with insignificant percentage, as shown in Fig.6 (b) [10].

(a)

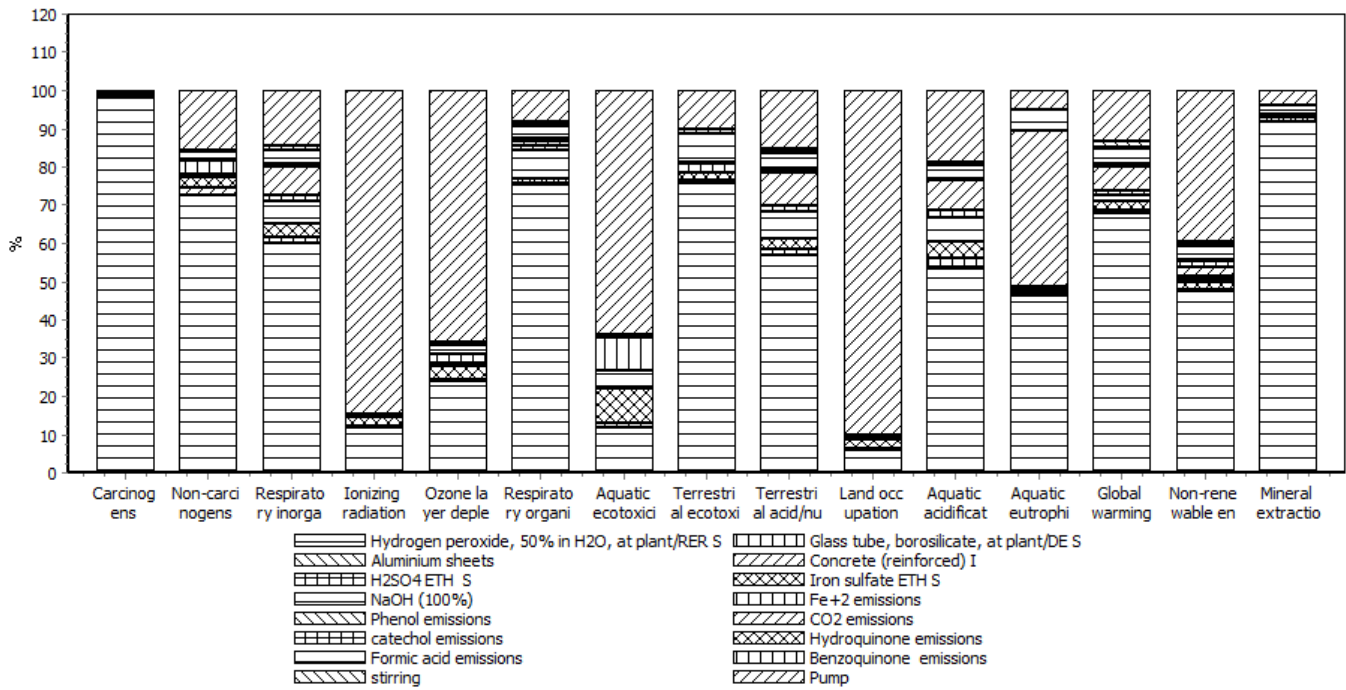

Analyzing 1 p 'solar photo-Fenton process'; Method: IMPACT 2002+ V2.05 / IMPACT 2002+ / characterization

(b)

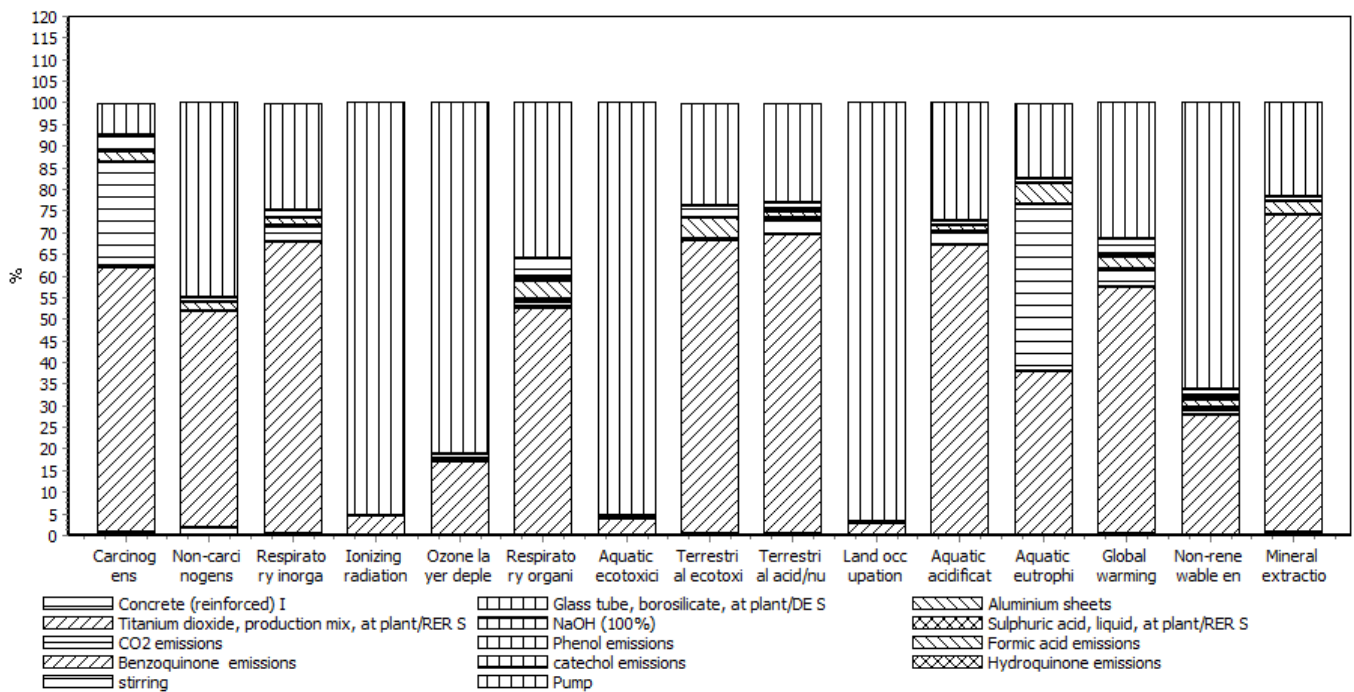

Analyzing 1 p 'photocatalysis process'; Method: IMPACT 2002+ V2.05 / IMPACT 2002+ / characterization

Fig.6 Contribution of inventory in environmental impacts (a) photo-Fenton (b) Photocatalysis

#### IV. CONCLUSION

The goal of this research is to study and interpret the environmental impacts of two methods for the treatment of phenolic wastewater. The two methods of treatment are solar photo-Fenton and solar photocatalysis using  $\text{TiO}_2$ . The solar photo-Fenton process was an eco-friendly method because it caused low harmful environmental impacts per all categories of the IMPACT 2002 method. In  $\text{TiO}_2$  photocatalysis method,  $\text{TiO}_2$  increased the potentials of carcinogens, Non-carcinogens, Respiratory inorganics, Respiratory organics, Terrestrial ecotoxicity, Terrestrial acid, Aquatic acidification, and Mineral extraction. Eco-friendly materials should be used to reach an eco-friendly performance of chemical treatment methods of phenolic wastewater.

#### REFERENCES

- [1] H. Awad, M. Gar Alalm, and H. K. El-Etriby, "Environmental and cost life cycle assessment of different alternatives for improvement of wastewater treatment plants in developing countries," *Sci. Total Environ.*, vol. 660, pp. 57–68, 2019.
- [2] F. Di Maria and F. Sisani, "Environmental Technology & Innovation A life cycle assessment of conventional technologies for landfill leachate treatment," *Environ. Technol. Innov.*, vol. 8, pp. 411–422, 2017.
- [3] R. Rodríguez, J. J. Espada, M. Gallardo, R. Molina, and M. J. López-Muñoz, "Life cycle assessment and techno-economic evaluation of alternatives for the treatment of wastewater in a chrome-plating industry," *J. Clean. Prod.*, vol. 172, pp. 2351–2362, 2018.
- [4] K. K. Gangu, S. Maddila, and S. B. Jonnalagadda, "A review on novel composites of MWCNTs mediated semiconducting materials as photocatalysts in water treatment," *Sci. Total Environ.*, vol. 646, pp. 1398–1412, 2019.
- [5] L. Yu, J. Chen, Z. Liang, W. Xu, L. Chen, and D. Ye, "Degradation of phenol using  $\text{Fe}_3\text{O}_4$ -GO nanocomposite as a heterogeneous photo-Fenton catalyst," *Sep. Purif. Technol.*, vol. 171, pp. 80–87, 2016.
- [6] J. Gao, M. Liu, H. Song, S. Zhang, Y. Qian, and A. Li, "Highly-sensitive electrocatalytic determination for toxic phenols based on coupled cMWCNT/cyclodextrin edge-functionalized graphene composite," *J. Hazard. Mater.*, vol. 318, pp. 99–108, 2016.
- [7] K. Hjaila, R. Baccar, M. Sarrà, C. M. Gasol, and P. Blázquez, "Environmental impact associated with activated carbon preparation from olive-waste cake via life cycle assessment," *J. Environ. Manage.*, vol. 130, pp. 242–247, 2013.
- [8] A. B. Bisinella de Faria, M. Spérandio, A. Ahmadi, and L. Tiruta-Barna, "Evaluation of new alternatives in wastewater treatment plants based on dynamic modelling and life cycle assessment (DM-LCA)," *Water Res.*, vol. 84, pp. 99–111, 2015.
- [9] M. Gar Alalm, A. Tawfik, and S. Ookawara, "Investigation of optimum conditions and costs estimation for degradation of phenol by solar photo-Fenton process," *Appl. Water Sci.*, vol. 7, no. 1, pp. 375–382, Nov. 2014.
- [10] M. G. Alalm, A. Tawfik, and A. Chemicals, "Solar Photocatalytic Degradation of Phenol in Aqueous Solutions Using Titanium Dioxide," vol. 8, no. 2, pp. 144–147, 2014.
- [11] J. A. Zazo, J. A. Casas, A. F. Mohedano, M. A. Gilarranz, and J. J. Rodríguez, "Chemical pathway and kinetics of phenol oxidation by Fenton's reagent," *Environ. Sci. Technol.*, vol. 39, no. 23, pp. 9295–9302, 2005.
- [12] A. Santos, P. Yustos, T. Cordero, S. Gomis, S. Rodríguez, and F. García-Ochoa, "Catalytic wet oxidation of phenol on active carbon: Stability, phenol conversion and mineralization," *Catal. Today*, vol. 102–103, pp. 213–218, 2005.
- [13] M. Meneses, H. Concepción, D. Vrecko, and R. Vilanova, "AC," *J. Clean. Prod.*, 2015.
- [14] A. M. Beltran et al., "Accounting for inventory data and methodological choice uncertainty in a comparative life cycle assessment: the case of integrated multi-trophic aquaculture in an offshore Mediterranean enterprise," 2017.
- [15] W. Jin, D. Duc, X. Thanh, S. Woo, and S. Woong, "A magnetically separable and recyclable Ag-supported magnetic  $\text{TiO}_2$  composite catalyst: Fabrication, characterization, and photocatalytic activity," *J. Environ. Manage.*, pp. 2–9, 2018.